

HK INSTRUMENTS

USER-FRIENDLY MEASURING DEVICES



MADE IN
FINLAND

PRODUCT CATALOGUE

2017

EN

HIGH-QUALITY MEASURING DEVICES FOR CLEAN INDOOR AIR

HK Instruments is a family-owned Finnish company that helps its customers to keep the quality of indoor air and the functionality of buildings high, resulting in well-being and energy savings. We design highly accurate and easy-to-use measuring devices, mainly for HVAC applications in ventilation and building automation systems.

Having lived in the clean Finnish climate, we know what it is like to breath in good-quality fresh air. This is why we have been leading the way, in Finland and abroad, for 30 years, allowing everyone to enjoy good-quality indoor air.

Our advanced measuring devices produce highly accurate real-time information about indoor air to the building management system. This leads to high functionality of the building, which supports the wellbeing of people while keeping energy costs down. Our products are known for their ease of use. Applications for our devices range from highly demanding laboratory conditions to regular residential buildings.

We understand that there are different needs in different parts of the world and in different applications. This is why we work with you to customise our solutions for your needs. Using the information our devices produce, we help you to make smart decisions to support the wellbeing of your people and the functionality of your building. Our decades of experience and our broad product range allow us to offer our services to market areas at highly different levels of development.

PEOPLE SPEND NEARLY 90% OF THEIR TIME INDOORS. THE QUALITY OF INDOOR AIR IS NOT INSIGNIFICANT. CLEAN INDOOR AIR THAT MAINTAINS WELLBEING IS ONE OF THE PRECONDITIONS FOR LIFE. THE CORRECT KIND OF INDOOR AIR MAINTAINS HEALTH, ENERGY LEVELS AND COMFORT. GOOD-QUALITY INDOOR AIR SAVES COSTS IN HEALTHCARE AND BUILDING MAINTENANCE.

VALUES

- Family
- Friendship
- Basic Needs of People

VISION

HK Instruments has a vision of being the best in the world in manufacturing user-friendly measuring devices for HVAC, and being a friendly partner.

MISSION

Our mission is to provide clean indoor air and energy savings by manufacturing user-friendly measuring devices for HVAC.



COOPERATION WITH CTS TEKNIK IN DENMARK

A lot has happened since CTS Teknik began working with HK Instruments in 2001. HK Instruments' product portfolio has grown substantially since and has kept up with our customers' demand. Both companies have developed positively during these years and are looking forward to continuing this successful cooperation in the future.

CTS Teknik sells HK Instruments products to BMS and HVAC sectors in Denmark. We chose HK Instruments as a supplier because they have a great product portfolio and they are good at listening to our customers' needs for new products. We always have a good technical dialogue with them whether it is about old or new products.

The majority of our customers are in the BMS industry and there has been a lot of progress in Modbus products for HVAC customers too. Our customers are very satisfied with the fast delivery time, which means that they do not need to have a large stock.

Everyone in the HVAC industry is talking about indoor air quality in buildings and this is something HK products help to achieve.



Henrik S. Andersen / CTS Teknik

HK INSTRUMENTS EXPERTISE IN CERN

CERN, the European Laboratory for Particle Physics, is carrying out a large project to monitor and regulate the air conditioning inside the LHC (Large Hadron Collider), the particle accelerator that led to the discovery of the Higgs Boson. For the differential pressure measurements, CERN has selected the DPT250-R8 sensor from HK Instruments to meet the Organization's stringent requirements in terms of precision, reliability and ease of integration. A total of 50 DPT transmitters have been installed in the underground areas such as experimental caverns, across galleries and pressurized modules. In addition, air quality transmitters of type CDT2000 are used for the control of air conditioning in control rooms of the LHC experiments.

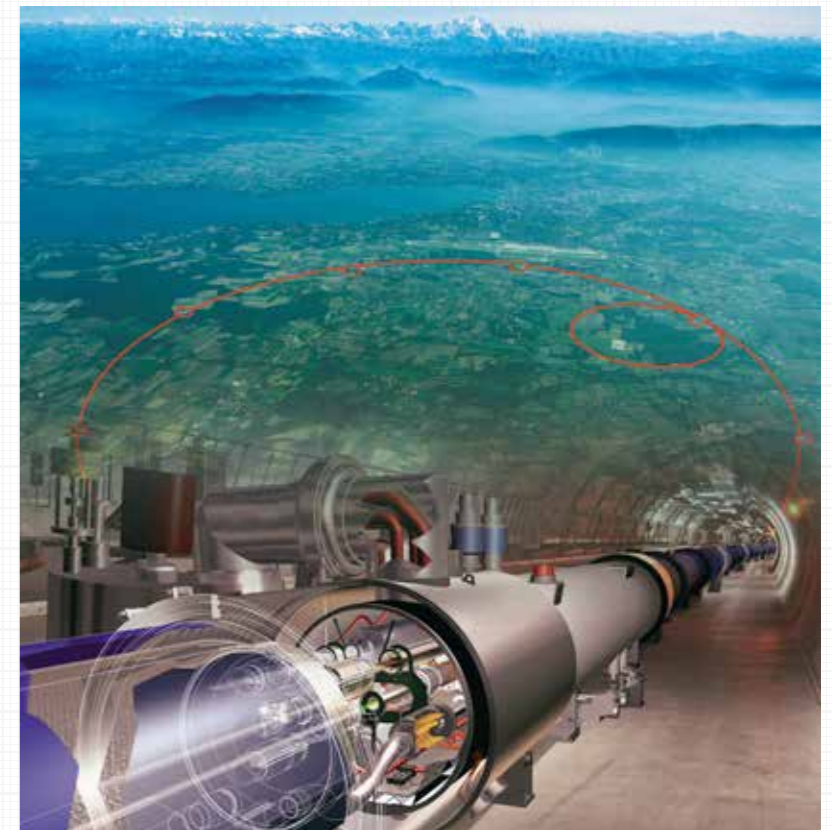


Image: CERN

PRODUCT PORTFOLIO

Solutions for measuring air pressure, air flows, air velocities, liquid pressures, temperature, CO₂ gas concentration and relative humidity within air handling and ventilation systems.

DIFFERENTIAL PRESSURE TRANSMITTERS

DPT-R8	8-range differential pressure transmitter.....	10
DPT-MOD	Differential pressure transmitter with air flow measurement and Modbus communication.....	12
DPT-IO-MOD	Differential pressure transmitter with Input terminal and Modbus communication.....	14
DPT-DUAL-MOD	Differential pressure transmitter with two pressure sensors and Modbus communication.....	16
DPT-CTRL	Air handling controller.....	18
DPT-2W	Differential pressure transmitter with 2-wire configuration.....	20

AIR FLOW AND VELOCITY TRANSMITTERS

DPT-FLOW	Flow transmitter for HVAC systems.....	26
FLOXACT™	Multi-point pitot tube for flow measurements.....	28
DPT-FLOW-BATT	Battery powered air flow meter.....	30
AVT	Air velocity and temperature transmitter with relay output.....	32

CARBON DIOXIDE TRANSMITTERS

CDT2000	Wall mount CO ₂ and temperature transmitter.....	36
CDT2000 DUCT	CO ₂ and temperature transmitter for duct.....	38

HUMIDITY TRANSMITTERS

RHT	Wall mount humidity (rH) and temperature transmitter.....	42
RHT DUCT	Humidity (rH) and temperature transmitter for duct.....	44



DPT-R8



DPT-MOD



DPT-DUAL



DPT-CTRL



DPT-FLOW



AVT




CDT2000



RHT DUCT



DPG



MM/MMU/MMK



DPI




PS



PTE-DUCT



PTE-ROOM



PTE-CABLE



PTE-O



CARBON MONOXIDE TRANSMITTER

CMT	Carbon monoxide transmitter.....	46
-----	----------------------------------	----

PRESSURE TRANSMITTERS FOR LIQUIDS

PTL	Pressure transmitter for liquids.....	48
DPTL	Differential pressure transmitter for liquids.....	48

PASSIVE TEMPERATURE SENSORS

PTE-DUCT	Duct temperature sensor.....	52
PTE-ROOM	Room temperature sensor.....	54
PTE-CABLE	Cable temperature sensor.....	56
PTE-O/OI	Outside air temperature/illuminance sensor.....	58

AIR PRESSURE GAUGES & MANOMETERS

DPG	Differential pressure gauge.....	60
MM	Liquid column manometer with leakage protection system.....	62
MMU	U-tube manometer.....	62
MMK	Vertical tube manometer.....	62

PRESSURE SWITCHES

DPI	Electronic differential pressure switch with 2 relays and 0-10 V output.....	64
PS	Mechanical differential pressure switch.....	66


FILTER ALERTS (DISPLAY + RELAY)

MM/PS	Combination of liquid column manometer and differential pressure switch.....	68
DPG/PS	Combination of differential pressure gauge and differential pressure switch.....	68

APPLICATIONS

DPT-Flow transmitters are used to actively control air flow and maintain pressure balance. Excellent results in indoor air quality and energy savings are reached when DPT-Flow is used with temperature and air quality sensors. Demand-controlled ventilation ensures good indoor air quality and comfortable conditions for everyone.

DPT-R8 transmitters are used to monitor filter and heat recovery systems. Monitoring is the key to maintaining clean filters and maximal efficiency of the heat recovery. This will reduce system load, which means energy and cost savings for the building owner.

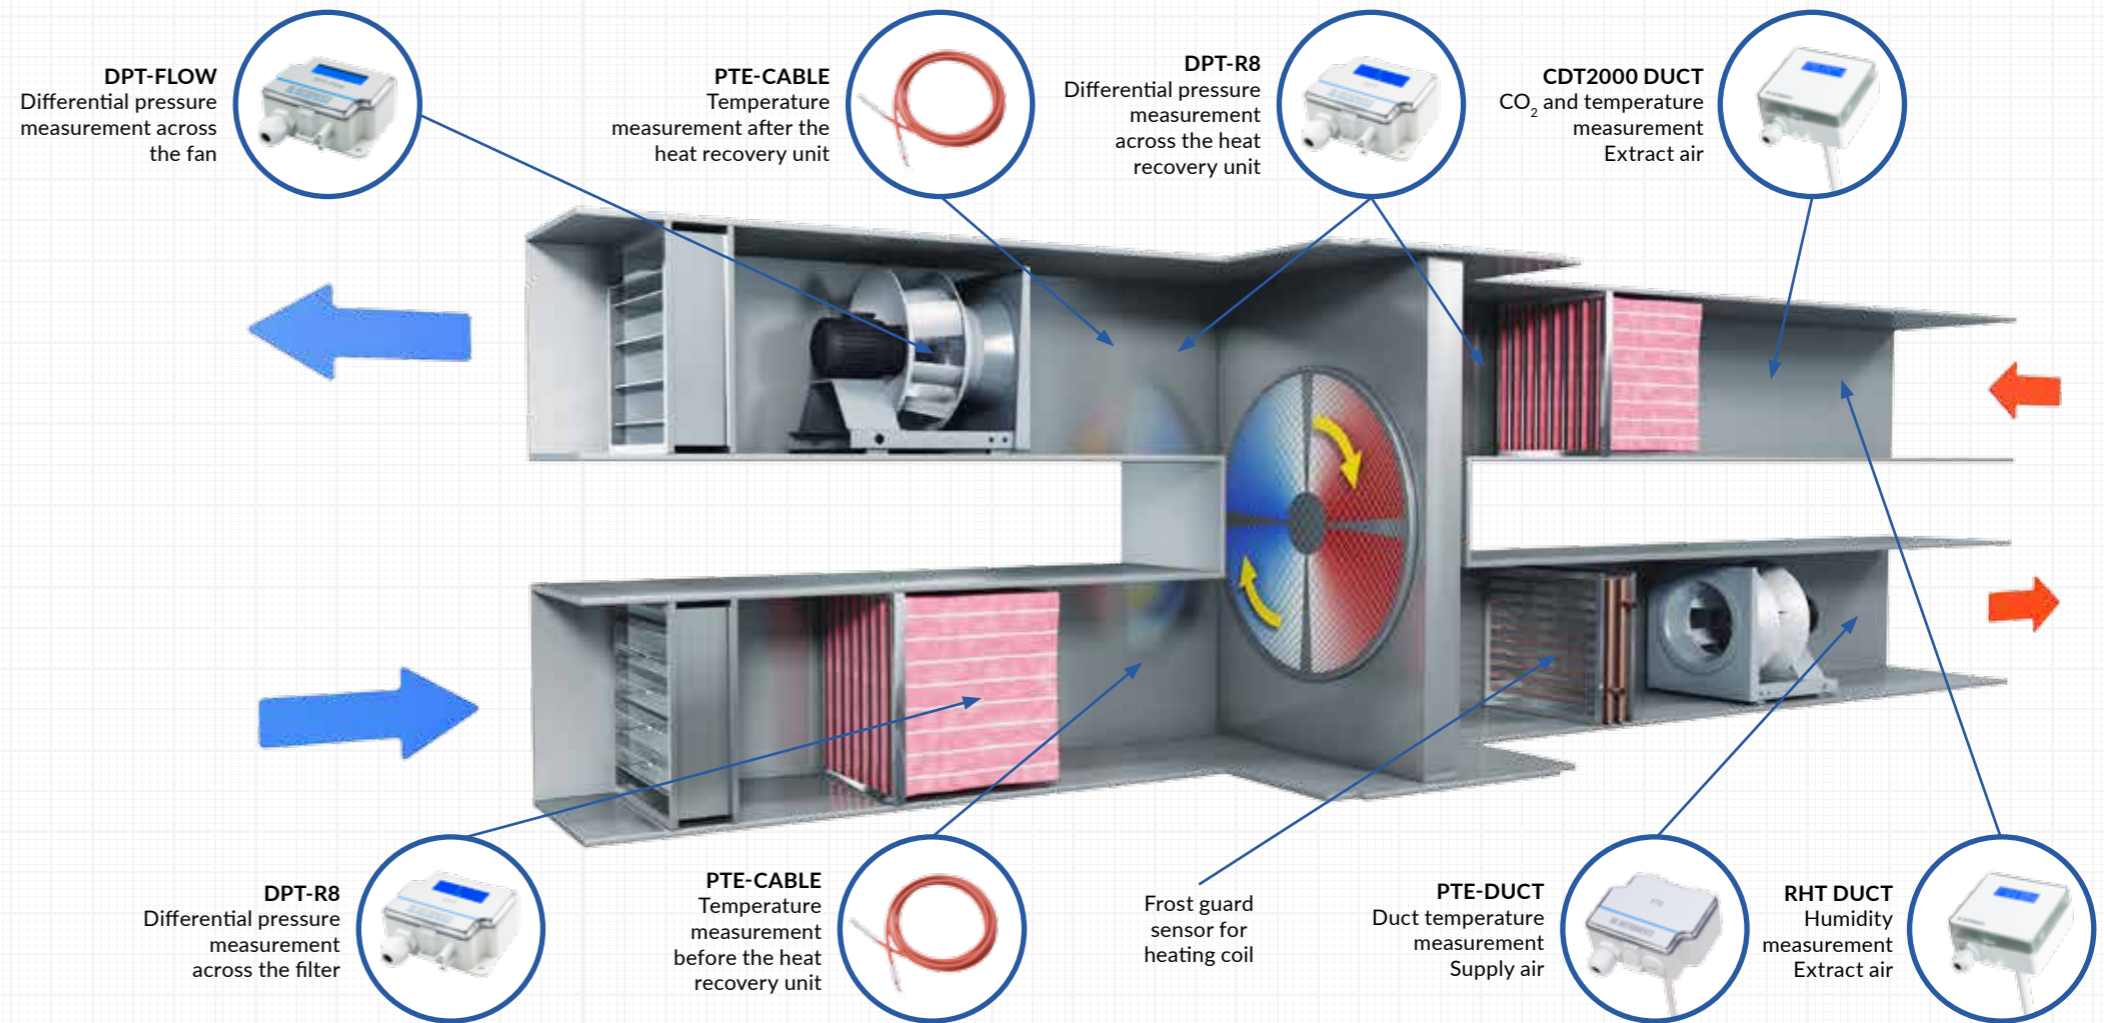

DPT-DUAL-MOD-AHU + PTE SENSORS
Differential pressure, air flow and temperature measurement
FLOW: Across the fan
PDI: Across the filter
IN1: TE after the heat recovery unit
IN2: TE before the heat recovery unit

DPT-MOD
Differential pressure measurement across the heat recovery unit

CDT-MOD-2000 DUCT
CO₂ and temperature measurement Extract air

RHT-MOD DUCT
Humidity measurement Extract air

DPT-DUAL-MOD + PTE SENSORS
Differential pressure and temperature measurement
PDI1: Across the fan
PDI2: Across the filter
IN1: TE heating coil
IN2: TE supply air

MODBUS SOLUTION

Our main products are also available with Modbus communication. When using a bus solution, you need less wires in cables and fewer input points in the controller. As a result, you will save in costs of the devices and in the installation costs.

DPT-DUAL-MOD combines two differential pressure transmitters into one device. When using the Input terminal, temperature transmitters can be replaced with temperature sensors. This makes it possible to measure four different types of data.

With the Modbus solution you only need 4 wires as opposed to 23 wires when using the traditional solution.



DIFFERENTIAL PRESSURE TRANSMITTERS

DPT series pressure transmitters represent the latest development in their class. The digital sensor makes measuring pressure even more accurate than before. Fully automated zero point calibration, *AZ-calibration*, offers reliability in the most sensitive of applications. In addition, it provides cost savings over the lifetime of a building, as it makes the device completely maintenance free.

While DPT-R8 offers up to eight measuring ranges in a single device, DPT-MOD makes two-way communication possible over Modbus network.

The DPT-DUAL-MOD with Modbus interface offers savings in the device and installation costs due to its two pressure sensors and Input terminal.

DPT-R8	8-range differential pressure transmitter	10
DPT-MOD	Differential pressure transmitter with air flow measurement and Modbus communication.....	12
DPT-IO-MOD	Differential pressure transmitter with Input terminal and Modbus communication ..	14
DPT-DUAL-MOD	Differential pressure transmitter with two pressure sensors and Modbus communication	16
DPT-CTRL	Air handling controller	18
DPT-2W	Differential pressure transmitter with 2-wire configuration	20



DPT-R8



DPT-MOD



DPT-IO-MOD



DPT-DUAL-MOD



DPT-CTRL



DPT-2W

DIFFERENTIAL PRESSURE TRANSMITTERS

THREE-WIRE



DPT-R8

The DPT series includes electronic differential pressure transmitters that offer exceptional performance, high quality and economical pricing.

USAGE & APPLICATIONS

The differential pressure transmitter is used for measuring low pressures of air and non-combustible gases in order to monitor and control building automation, HVAC and cleanroom systems.

OPTIONS

AZ: autozero element **D:** display **S:** span point calibration for high accuracy applications
-40C: cold-resistant model

TECHNICAL DETAILS

Accuracy (from applied pressure): (models 250 and 2500)	Pressure < 125 Pa = 1 % + ±2 Pa Pressure > 125 Pa = 1 % + ±1 Pa
Accuracy (from applied pressure): (model 7000)	Pressure < 125 Pa = 1.5 % + ±2 Pa Pressure > 125 Pa = 1.5 % + ±1 Pa
Zero point calibration:	automatic with autozero element (-AZ) or by pushbutton
Measuring units:	Pa, kPa, mbar, inchWC, mmWC, psi
Supply voltage:	24 VDC ±10 % / 24 VAC ±10 %
Power consumption:	< 1.0 W (< 1.2 W with output current 20 mA)
Output signals (3-wire):	0...10 VDC, Load R minimum 1 kΩ 4...20 mA, maximum load 500 Ω
Operating temperature:	-10...+50 °C (with autozero calibration -5...+50 °C) -40...+50 °C (-40C model)
Response time:	0.8 / 4 s
Protection standard:	IP54

DPT-R8

Example: DPT2500-R8-AZ-D	Product series DPT	Differential pressure transmitter
	Measuring ranges (Pa)	
	250	-150...+150 / -100...+100 / -50...+50 / -25...+25 / 0...25 / 0...50 / 0...100 / 0...250
	2500	-100...+100 / 0...100 / 0...250 / 0...500 / 0...1000 / 0...1500 / 0...2000 / 0...2500
	7000	0...1000 / 0...1500 / 0...2000 / 0...2500 / 0...3000 / 0...4000 / 0...5000 / 0...7000
	Model type	
	-R8	Eight measuring ranges
	Zero point calibration	
	-AZ	With autozero calibration
		Standard with pushbutton manual zero point calibration
	Display	
	-D	With display
		Without display
	Span point calibration	
	-S	Span point calibration
		Without span point calibration
Model	DPT	2500 -R8 -AZ -D

DIFFERENTIAL PRESSURE TRANSMITTERS

WITH AIR FLOW MEASUREMENT
AND MODBUS COMMUNICATION

NEW!



DPT-MOD

DPT-MOD is a multifunctional transmitter for measuring volume flow, velocity, and static and differential pressure. The measurements can be read and the configuration done via Modbus communication. DPT-MOD requires less wiring than the traditional 3-wire transmitters because multiple devices can be connected on serial line.

USAGE & APPLICATIONS

The DPT-MOD is used for measuring air flow or low pressures of air and non-combustible gases in order to monitor and control building automation, HVAC and cleanroom systems. It can also be used with several different measurement probes such as FLOXACT™ or pitot tube, and air dampers.

TECHNICAL DETAILS

Communication:	RS-485 Modbus (RTU)
Accuracy (from applied pressure): (models 250 and 2500)	Pressure < 125 Pa = 1 % + ±2 Pa Pressure > 125 Pa = 1 % + ±1 Pa
Accuracy (from applied pressure): (model 7000)	Pressure < 125 Pa = 1.5 % + ±2 Pa Pressure > 125 Pa = 1.5 % + ±1 Pa
Zero point calibration:	automatic with autozero element (-AZ), by pushbutton or via Modbus
Measuring units:	Pressure: Pa, kPa, mbar, inchWC, mmWC, psi Flow: m3/s, m3/hr, cfm, l/s, m/s, ft/min
Supply voltage:	24 VAC ±10 % / 24 VDC ±10 %
Power consumption:	< 1.0 W
Output signal:	via Modbus
Response time:	1.0–20 s, selectable via menu or via Modbus
Operating temperature:	-10...+50 °C (with autozero calibration -5...+50 °C)
Protection standard:	IP54

**ALL-IN-ONE TRANSMITTER:
MEASURE VOLUME FLOW,
VELOCITY AND DIFFERENTIAL
PRESSURE**

DPT-MOD

Example: DPT-MOD-2500-AZ-D	Product series DPT	Differential pressure transmitter			
		Model type			
		-MOD	Modbus communication		
		Measuring ranges (Pa)			
		-2500	-250...2500		
		-7000	-250...7000		
		Zero point calibration			
		-AZ	With autozero calibration		
			Standard with pushbutton manual zero point calibration		
		Display			
		-D	With display		
Model	DPT	-MOD	-2500	-AZ	-D



**NOW AVAILABLE WITH AIR
FLOW MEASUREMENT AND
AUTOZERO CALIBRATION**

DIFFERENTIAL PRESSURE TRANSMITTERS

WITH MODBUS INTERFACE AND INPUT TERMINAL



DPT-IO-MOD

DPT-IO-MOD differential pressure transmitter for air is designed for Modbus (RTU) communication network. The DPT-IO-MOD has an input terminal that turns it into a multifunction transmitter. When using the input terminal, temperature transmitters can be replaced with temperature sensors. Very precise pressure sensor and easily operated interface make the device reliable and user-friendly.

USAGE & APPLICATIONS

The DPT-IO-MOD is used for measuring low pressures of air and non-combustible gases in order to monitor and control building automation, HVAC and cleanroom systems.

TECHNICAL DETAILS

Communication:	RS-485 Modbus (RTU)
Accuracy (from applied pressure):	Pressure < 125 Pa = 1 % + ± 2 Pa
(models 250 and 2500)	Pressure > 125 Pa = 1 % + ± 1 Pa
Accuracy (from applied pressure):	Pressure < 125 Pa = 1.5 % + ± 2 Pa
(model 7000)	Pressure > 125 Pa = 1.5 % + ± 1 Pa
Zero point calibration:	via Modbus or by pushbutton
Measuring units:	Pa, kPa, mbar, inchWC, mmWC, psi
Supply voltage:	24 VDC ± 10 % / 24 VAC ± 10 %
Power consumption:	< 1.3 W
Operating temperature:	-10...+50 °C
Response time:	1...20 s selectable via menu
Protection standard:	IP54

SAVE IN COSTS OF THE DEVICES AND IN THE INSTALLATION COSTS

DPT-IO-MOD

Example: DPT-IO-MOD-2500-D	Product series			
	DPT	Differential pressure transmitter		
	Model type			
	-IO-MOD	Input terminal and Modbus communication		
	Measuring ranges (Pa)			
	-2500	-250...2500		
	-7000	-250...7000		
Display				
	-D	With display		
Model	DPT	-IO-MOD	-2500	-D



Traditional system:


Temperature sensor (e.g. PT1000)

Temperature sensor (e.g. NTC10)

New system with DPT-IO-MOD or DPT-Dual-MOD

Temperature sensor (e.g. PT1000)

Temperature sensor (e.g. NTC10)

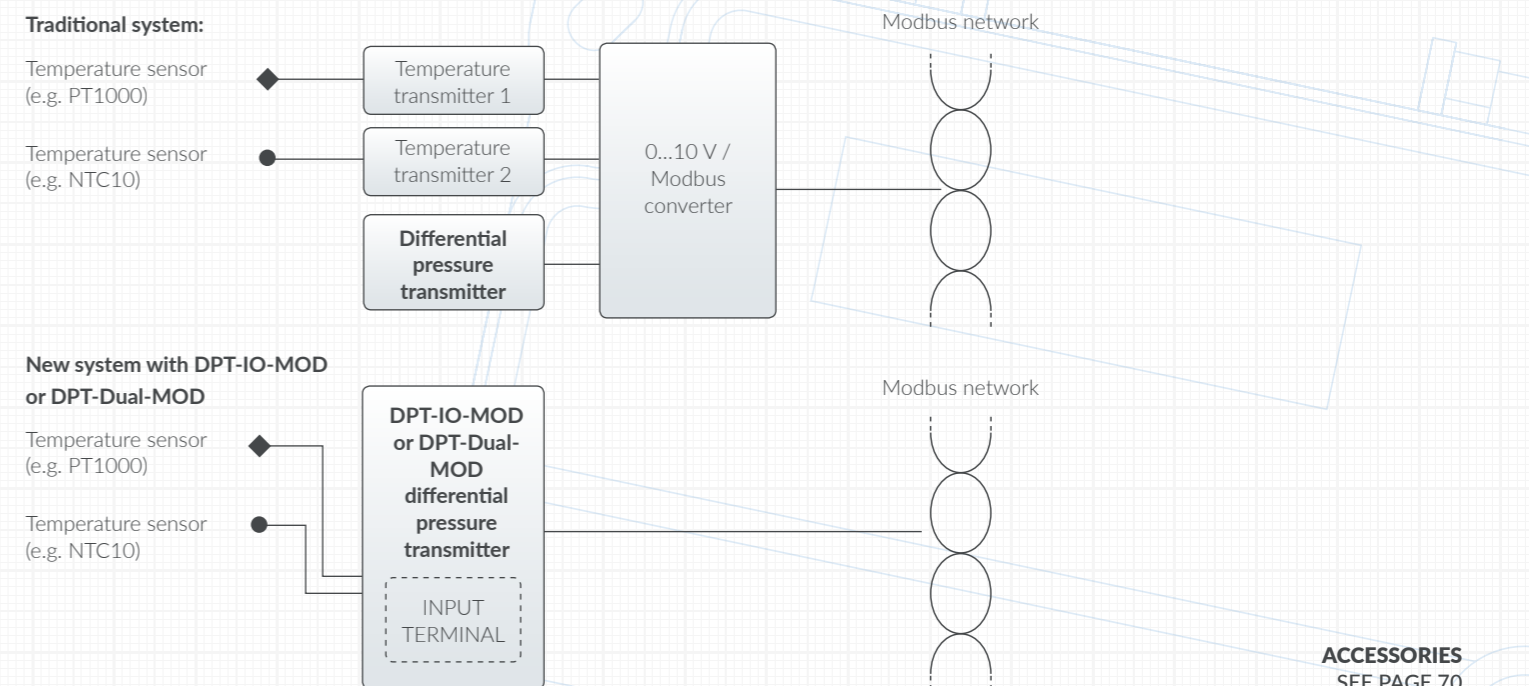

DIFFERENTIAL PRESSURE TRANSMITTER

WITH TWO PRESSURE SENSORS



DPT-DUAL-MOD

DPT-DUAL-MOD combines two differential pressure transmitters into one device. It offers a possibility to measure pressure from two different points. One of the measurements can be set to show the air flow rate. DPT-DUAL-MOD has a Modbus interface and an Input terminal. When using the Input terminal, temperature transmitters can be replaced with temperature sensors. As a result, you will save in costs of the devices and in the installation costs. The AHU model that includes an air flow transmitter has been designed especially for ventilation units.

USAGE & APPLICATIONS

DPT-DUAL-MOD can be used in all applications where you need to measure two different pressures. With the AHU model one of the measurements can be air flow. The devices are suitable for air and non-combustible gases.




TECHNICAL DETAILS

Communication:	RS-485 Modbus (RTU)
Accuracy (from applied pressure): (models 250 and 2500)	Pressure < 125 Pa = 1 % + ± 2 Pa Pressure > 125 Pa = 1 % + ± 1 Pa
Accuracy (from applied pressure): (model 7000)	Pressure < 125 Pa = 1.5 % + ± 2 Pa Pressure > 125 Pa = 1.5 % + ± 1 Pa
Zero point calibration:	via Modbus or by pushbutton
Measuring units:	Pressure: Pa, kPa, mbar, inchWC, mmWC, psi Flow: (AHU model) m ³ /s, m ³ /hr, cfm, l/s, m/s, ft/min
Supply voltage:	24 VDC ± 10 % / 24 VAC ± 10 %
Power consumption:	< 1.3 W
Operating temperature:	-10...+50 °C
Response time:	1...20 s selectable via menu
Protection standard:	IP54

AHU MODEL INCLUDES AN AIR FLOW TRANSMITTER

DPT-DUAL-MOD

Example:	Product series		
DPT-Dual-MOD-2500-D	DPT	Differential pressure transmitter	
		Model type	
		-Dual-MOD	Two pressure sensors and Modbus communication
		Measuring ranges (Pa)	
		-2500	-250...2500
		-7000	-250...7000
		-AHU	both 2500 and 7000 sensors, with flow measurement
		Display	
		-D	With display
Model	DPT	-Dual-MOD	-2500
			-D

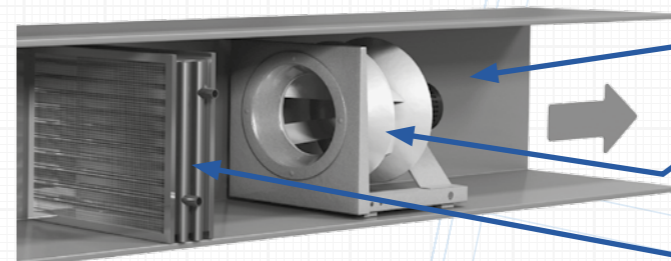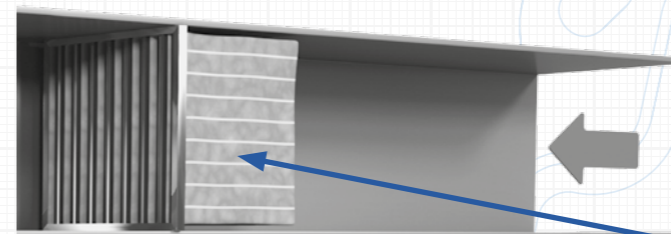

DPT-Dual-MOD transmitters can be used to measure four different types of data, for example air flow, filter condition, heating coil and air temperature.

AIR HANDLING CONTROLLER



DPT-CTRL

DPT-CTRL is a multifunctional PID controller with differential pressure or air flow transmitter. It enables controlling constant pressure or flow of fans, VAV systems or dampers. When controlling flow, it is possible to select a fan manufacturer or a common measuring probe that has a K-value.

USAGE & APPLICATIONS


DPT-CTRL can be used to control air flow or constant pressure in applications where it is important to keep a constant vacuum or a steady air flow, such as vacuuming units in renovation sites that keep a constant negative pressure so that impurities do not spread to other spaces.

TECHNICAL DETAILS

Accuracy (from applied pressure): (models 250 and 2500)	Pressure < 125 Pa = 1 % + ±2 Pa Pressure > 125 Pa = 1 % + ±1 Pa
Accuracy (from applied pressure): (model 7000)	Pressure < 125 Pa = 1.5 % + ±2 Pa Pressure > 125 Pa = 1.5 % + ±1 Pa
Measuring units:	Pressure: Pa, kPa, mbar, inchWC, mmWC, psi Flow: m ³ /s, m ³ /hr, cfm, l/s, m/s, ft/min
Control signal:	0...10 V or 4...20 mA (selectable by jumper)
Output signal for pressure or air flow (selectable via menu):	0...10 VDC, Load R minimum 1 kΩ or 4...20 mA, maximum load 500 Ω (selectable by jumper)
PID-parameters:	Adjustable via menu
Zero point calibration:	Automatic with autozero element (-AZ) or by pushbutton
Supply voltage:	24 VDC ±10 % / 24 VAC ±10 %
Power consumption:	< 1.0 W
Operating temperature:	-10...+50 °C (with autozero calibration -5...+50 °C)
Protection standard:	IP54

DPT-CTRL

Example: DPT-CTRL-2500-AZ-D	Product series DPT-CTRL	Air handling controller
	Model type	Analog outputs
	-MOD	Modbus communication
	Measuring ranges (Pa)	
	-2500	0...2500
	-7000	0...7000
	Zero point calibration	
	-AZ	With autozero calibration (not available for Modbus model)
		Standard with pushbutton manual zero point calibration
	Display	
	-D	With display
Model	DPT-CTRL	-2500 -AZ -D

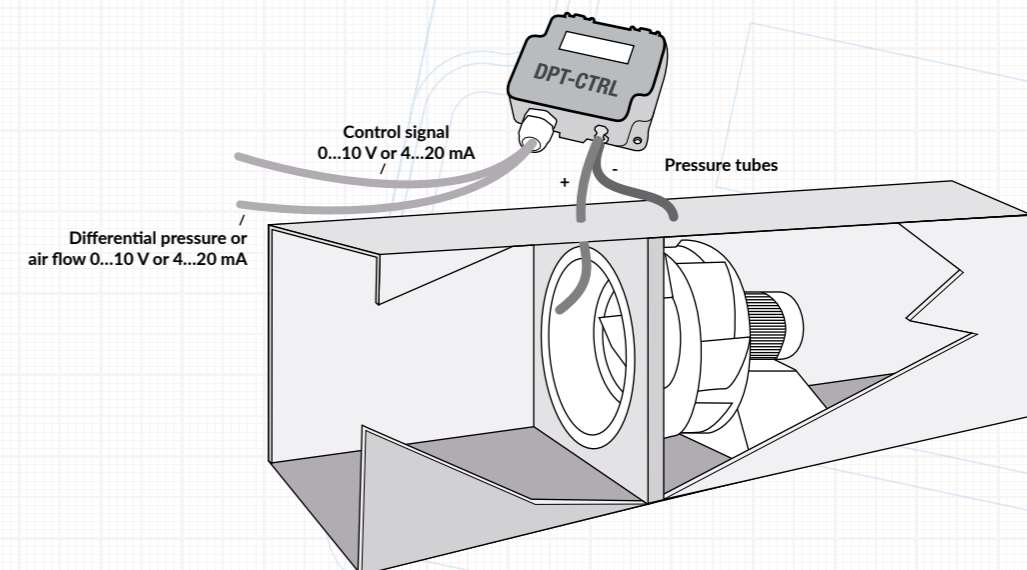

DIFFERENTIAL PRESSURE TRANSMITTERS

TWO-WIRE



DPT-2W

The DPT-2W is a differential pressure transmitter with two-wire connection.

USAGE & APPLICATIONS

The differential pressure transmitter is used for measuring low pressures of air and non-combustible gases in order to monitor and control building automation, HVAC and cleanroom systems.

TECHNICAL DETAILS

Accuracy (from FS):	±1.5 %
Long term stability, typical 1 year:	≤ ± 8 Pa; model 2500
Measuring unit:	Pa
Zero point calibration:	by pushbutton
Supply voltage:	10...35 VDC
Output signal:	4...20 mA
Operating temperature:	-10...+50 °C
Response time:	0.8 / 4 s
Protection standard:	IP54

DPT-2W

Example: DPT-2W-2500-R8-D	Product series	
	DPT-2W	Differential pressure transmitter with 2-wire configuration
	Measuring ranges (Pa)	
	-2500 / -100...+100 / 0...100 / 0...250 / 0...500 / 0...1000 / 0...1500 / 0...2000 / 0...2500	
Model	Model type	
	-R8	Eight measuring ranges
	Display	
	-D	With display
		Without display
Model	DPT-2W	-2500 / -R8 / -D

AIR FLOW AND VELOCITY TRANSMITTERS

DPT-FLOW transmitters are unique devices that make measuring air flow and air velocity easier than ever before. Together with FLOXACT™ measurement probes the same devices are the right option when measuring flow in a duct. Again, if you wish to measure air velocity, your selection would be AVT which offers multiple measuring ranges in a single device together with relay and temperature output signals.

DPT-FLOW	Flow transmitter for HVAC systems	26
FLOXACT™	Multi-point pitot tube for flow measurements	28
DPT-FLOW-BATT	Battery powered air flow meter	30
AVT	Air velocity and temperature transmitter with relay output	32



DPT-FLOW



FLOXACT™



DPT-FLOW-BATT




AVT



FLOW MEASUREMENT

PRODUCT SELECTION GUIDE

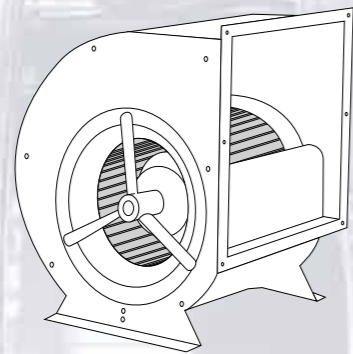

Fan flow measurement
(Measuring inlets in the fan)

Electricity available

Note:
Check the K-value from the fan's technical sheet

Fan manufacturers:
Fläkt Woods, Rosenberg, Comefri, Ziehl-Abegg, ebmpapst, Nicotra Gebhardt

Other fan types with formula
 $Q = K * \sqrt{\Delta P}$

DPT-FLOW
Fan flow transmitter

Info:
Air flow display and output

Electricity not available


Fixed scale, specific type of fan

DPG+FLOW SCALE
Mechanical flow meter

Flexible

DPT-FLOW-BATT
Fan flow meter with battery

Supported fan manufacturers:
Fläkt Woods, Rosenberg, Comefri, Ziehl-Abegg, ebmpapst, Nicotra Gebhardt

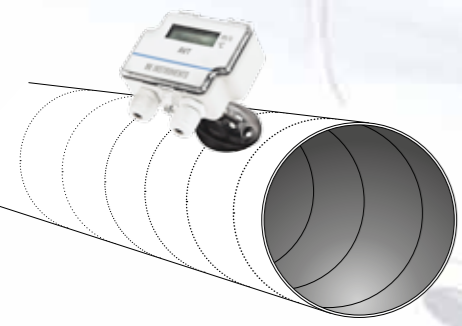

Flow in duct

Electricity available

Customer's own probe
For example iris damper, pressure grid, pitot tube etc.

DPT-FLOW
Flow transmitter

Info:
Air flow display and output

Probe not available

Air volume measurement

DPT-FLOW +FLOXACT
Flow transmitter with probe

Info:
Based on multipoint measurement, high accuracy

Air velocity and temperature measurement with optional relay output

AVT
Air velocity transmitter

Info:
Based on hot wire technique, no need for external probes or tubes

Electricity not available

Customer's own probe
For example iris damper, pressure grid, pitot tube etc.

DPG+FLOW SCALE
Mechanical flow meter

Probe not available

DPG+FLOW SCALE +FLOXACT
Mechanical flow meter with probe

FLOW TRANSMITTER FOR HVAC SYSTEMS



IDEAL PRODUCT FOR MEASURING THE FLOW RATE BOTH ON CENTRIFUGAL FANS AND IN A DUCT SYSTEM

DPT-FLOW

DPT-FLOW is a flow transmitter that provides an easy way to measure the flow rate on centrifugal fans or in a duct system. One device is suitable for a range of fan types. It can also be used with several different measurement probes such as FLOXACT™ or pitot tube, and air dampers.

USAGE

The DPT-FLOW can be used to measure the air flow on centrifugal fans or as a transmitter to regulate the air flow in a duct or on the selected fan or blower. It can also be used in a duct system or in air-handling units as an on-site display for flow.

APPLICATIONS

The DPT-FLOW is an ideal instrument for air flow monitoring and control, and fan and blower control.

TECHNICAL DETAILS

Accuracy (from applied pressure): (models 1000 and 2000)	Pressure < 125 Pa = 1 % + ±2 Pa Pressure > 125 Pa = 1 % + ±1 Pa
Accuracy (from applied pressure): (models 5000 and 7000)	Pressure < 125 Pa = 1.5 % + ±2 Pa Pressure > 125 Pa = 1.5 % + ±1 Pa
Zero point calibration:	automatic with autozero element (-AZ) or by pushbutton
Measuring units:	Pressure: Pa, kPa, mbar, inchWC, mmWC, psi Flow: m³/s, m³/hr, cfm, l/s, m/s, ft/min
Supply voltage:	24 VAC ±10 % / 24 VDC ±10 %
Power consumption:	< 1.0 W
Output signals for pressure and air flow (selectable by jumper):	0...10 VDC, Load R minimum 1 kΩ or 4...20 mA, maximum load 500 Ω
Operating temperature:	-10...+50 °C (with autozero calibration -5...+50 °C)
Response time:	1...20 s
Protection standard:	IP54
Calculation formula:	$V = k * \sqrt{\Delta P(Pa)}$

ALSO USABLE WITH MEASUREMENT PROBES SUCH AS FLOXACT™, PITOT TUBES, AND AIR DAMPERS

DPT-FLOW


Example:	Product series			
DPT-Flow-2000-AZ-D	DPT-Flow	Flow transmitter for HVAC systems		
		Model type		
		Analog outputs		
		Measuring ranges (Pa)		
		-1000	0...1000	
		-2000	0...2000	
		-5000	0...5000	
		-7000	0...7000	
		Zero point calibration		
		-AZ	With autozero calibration	
			Standard with pushbutton manual zero point calibration	
		Display		
		-D	With display	
Model	DPT-Flow	-2000	-AZ	-D

PRE-PROGRAMMED FAN MANUFACTURERS

Fläkt Woods, Rosenberg, Nicotra Gebhardt, Comefri, Ziehl-Abegg, ebm-papst

The fan only needs to have a pressure tap/port to which the DPT-Flow can be connected

FLOXACT™

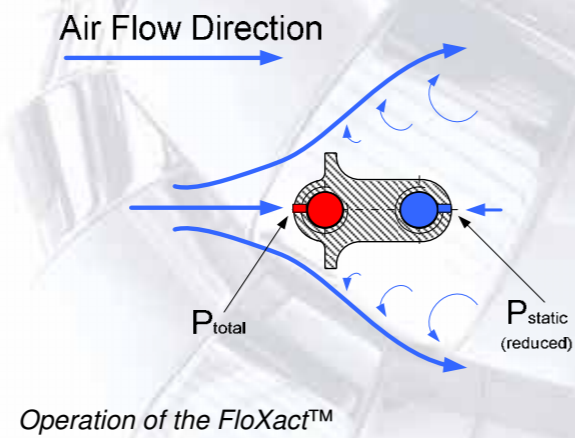

APPLICATION

The FLOXACT™ probe is a differential air pressure device designed to measure air velocities in a duct. It includes multiple sensing points to measure total and static pressures. The FLOXACT™ probe incorporates a unique design to amplify the differential pressure by approximately 2.5 times for accurate measurement of lower air velocities down to 1.0 m/s (200 fpm). It is easy to install and cost-effective.

DESIGN FEATURES

- Multiple sensing points for greater accuracy
- Easy installation
- Chamfered sensing points for consistent readings
- 2 % accuracy
- 2.5 X signal amplification
- Accepts 1/4" OD tubing

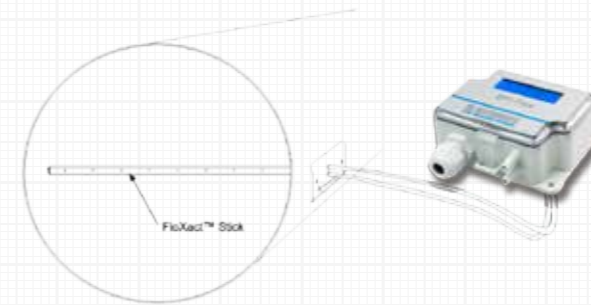


Figure 1. FloXact™ -R mounting.



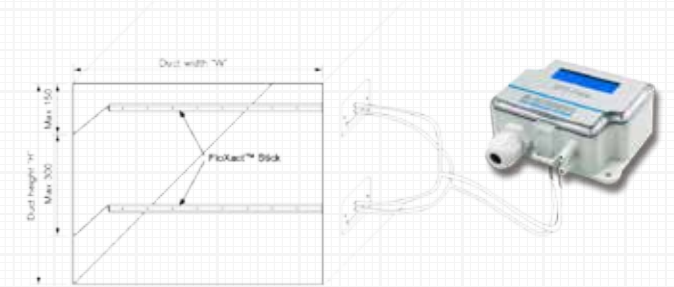


Figure 2. FloXact™ -L mounting.

Dimensions

FloXact™-R available models :
All standard round duct sizes up to 1200 m

FloXact™-L available models :
250, 300, ... 1200 (50 mm steps)

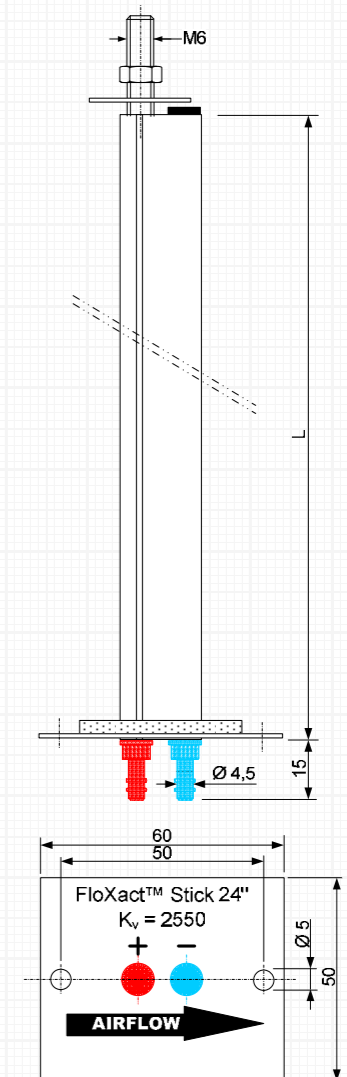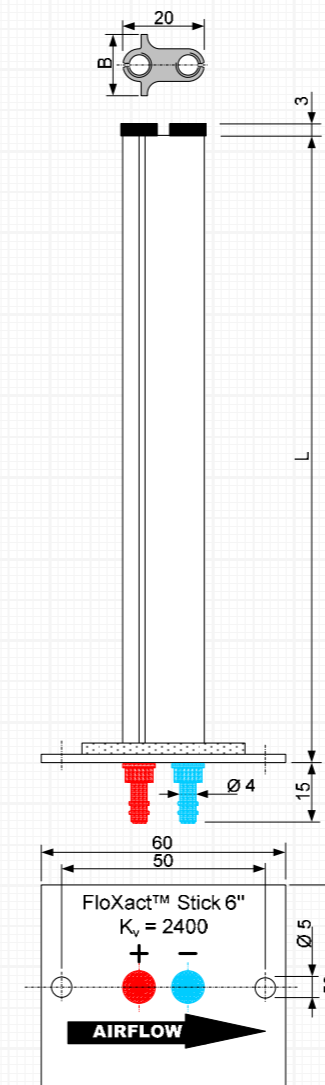

BATTERY POWERED AIR FLOW METER



DPT-FLOW-BATT

DPT-FLOW-BATT is a user-friendly on-site display for air flow designed for environments and applications where electricity is not available. One device is suitable for a range of different fan types. It also provides an easy way to measure flow rate in a duct system for example together with a FLOXACT™ averaging measurement probe.

USAGE & APPLICATIONS

The DPT-FLOW-BATT is an on-site display designed for air handling units to measure the air flow on centrifugal fans. The DPT-FLOW-BATT can also be used in the duct system as an on-site display for flow. The device can be used with several different measurement probes such as FLOXACT™ or pitot tube, and air dampers. The requirement is that the K-value of the measurement probe or damper is known.

TECHNICAL DETAILS

Accuracy (from FS):	±1.5 % (Including: general accuracy, temperature drift, linearity, hysteresis, long term stability, and repetition error)
Zero point calibration:	by pushbutton
Measuring units:	Pressure: Pa, kPa, mbar, inchWC, mmWC, psi Flow: m ³ /s, m ³ /hr, cfm, l/s, m/s, ft/min
Supply voltage:	9 V battery
Current consumption:	~20 mA on active mode
Operating temperature:	-10...+50 °C
Response time:	1.0–10 s, selectable via menu
Protection standard:	IP54

DPT-FLOW-BATT

Example:	Product series		
DPT-Flow-Batt-7000-D	DPT-Flow-Batt	Battery powered air flow meter	
		Measuring ranges (Pa)	
		-7000	0...7000
		Display	
		-D	With display
Model	DPT-Flow-Batt	-7000	-D

MEASURE THE AIR FLOW IN ENVIRONMENTS WHERE ELECTRICITY IS NOT AVAILABLE

AIR VELOCITY TRANSMITTER



AIR VELOCITY AND TEMPERATURE TRANSMITTER WITH RELAY OUTPUT

AVT

The AVT is an electronic air velocity and temperature transmitter for air and non-combustible gases with optional relay output.

USAGE

AVT is used in HVAC and building automation systems.

APPLICATIONS

Monitoring air velocity and temperature in ducts and laminar flow cabinets, and at ventilators and dampers.

TECHNICAL DETAILS

Accuracy (from reading):	< 0.1 m/s + 5 % (Range 0...2 m/s) < 0.5 m/s + 5 % (Range 0...10 m/s) < 1.0 m/s + 5 % (Range 0...20 m/s)
Measuring units:	m/s, °C
Supply voltage:	24 VDC ±10 % / 24 VAC ±10 %
Power consumption:	35 mA (50 mA with relay) + 40 mA with mA outputs
Output signal 1:	0...10 V (linear to °C), L min 1 kΩ or 4...20 mA (linear to °C), L max 400 Ω
Output signal 2:	0...10 V (linear to m/s), L min 1 kΩ or 4...20 mA (linear to m/s), L max 400 Ω
Optional relay output:	Potential free SPDT 250 VAC, 6 A / 30 VDC, 6 A with adjustable switching point and hysteresis
Operating temperature:	0...+50 °C
Probe:	Adjustable Immersion length 50...190 mm, mounting flange included
Protection standard:	IP54

AVT

Example:	Product series	
AVT-D-R	AVT	Air velocity transmitter, measuring ranges 0...2 / 0...10 / 0...20 m/s
		Display
	-D	With display
		Without display
		Relay
	-R	With relay
		Without relay
Model	AVT	-D -R

CARBON DIOXIDE TRANSMITTERS

CDT2000 series products are economical and versatile devices that measure CO₂ concentration and temperature (T). These devices are available for duct or wall mounting. CDT2000 is the first device measuring CO₂ with large touchscreen display enabling easy configuration and adjustment. CDT2000 Duct is a cost-effective solution for measuring the total concentration of CO₂ in duct systems.

CDT2000	Wall mount CO ₂ and temperature transmitter	36
CDT2000 DUCT	CO ₂ and temperature transmitter for duct	38



CDT2000



CDT2000 DUCT



CARBON DIOXIDE TRANSMITTERS

WALL MOUNTED



**TOUCHSCREEN
DISPLAY FOR EASY
ADJUSTMENT**

CDT2000

CDT2000 combines CO₂ concentration, temperature and optional relative humidity measurements into one easy-to-use device with a touchscreen display. It offers easy installation and adjustment, several different model options and various output signals that are configurable separately for each measurement parameter. CDT2000 utilizes the industry standard NDIR measurement principle with self-calibrating ABC-logic™ for CO₂ measurement. CDT2000-DC is a dual channel model with a measuring channel and a reference channel that makes a continuous comparison and the necessary adjustment accordingly. CDT2000-DC is also suitable for buildings that are continuously occupied.

USAGE & APPLICATIONS

CDT2000 wall mount model is used to monitor and control CO₂ and humidity levels in offices, public spaces, meeting rooms and classrooms. CDT2000-DC series devices can also be used in applications where there is a constant source of carbon dioxide present (for example hospitals and greenhouses).

TECHNICAL DETAILS

Accuracy:	CO ₂ : ±40 ppm + 2 % of reading, DC model: 75 ppm or 10 % of reading (whichever is greater) Temperature: <0.5 °C Relative humidity: ±2...3 % rH at 0...50 °C and 10...90 % rH Total error band includes accuracy, hysteresis and temperature effect over 5...50 °C and 10-90 % rH
Measurement elements:	Pt1000 temperature sensor, Non Dispersive Infrared (NDIR) CO ₂ sensor, thermoset polymer capacitive sensing element for humidity
Measuring units:	ppm, °C, % rH
Calibration:	Automatic self-calibration, ABC Logic™ or continuous comparison (DC)
Supply voltage:	24 VDC/VAC ±10 %
Current consumption:	max 90 mA (at 24 V) + 10 mA for each voltage output or 20 mA for each current output
Output signal 1:	0/2...10 V (linear to CO ₂), L min 1 kΩ or 4...20 mA (linear to CO ₂), L max 500 Ω
Output signal 2:	0/2...10 V (linear to rH), L min 1 kΩ or 4...20 mA (linear to rH), L max 500 Ω
Output signal 3:	0/2...10 V (linear to Temp), L min 1k Ω or 4...20 mA (linear to Temp), L max 500 Ω
Optional relay output:	Potential free SPDT 250 VAC, 6 A / 30 VDC, 6 A with adjustable switching point and hysteresis
Operating temperature:	0...+50 °C
Protection standard:	IP20

CDT

Example:	Product series
CDT2000-1R-D	CDT2000 Carbon dioxide transmitter, analog outputs
	CDT-MOD-2000 Carbon dioxide transmitter, Modbus communication
	Calibration
	ABC logic™, Automatic Background Calibration
	-DC Dual channel, for continuously occupied space
	Mounting
	Wall mount
	Relay (only for wall mount model)
	-1R With relay
	Without relay
	Relative humidity sensor (only for wall mount model)
	-rH With relative humidity sensor
	Without relative humidity sensor
	Display
	-D With display
	Without display
Model	CDT2000 -1R -D

**CDT2000-DC IS ALSO SUITABLE FOR BUILDINGS THAT
ARE CONTINUOUSLY OCCUPIED**

CARBON DIOXIDE TRANSMITTERS

DUCT MOUNTED



CDT2000 DUCT

CDT2000 Duct combines CO₂ and temperature measurements into one device installed in a ventilation duct. Illuminated display ensures easy readability also from a distance. The CDT2000 Duct has a screwless lid and an easily adjustable mounting flange that make installing the device easy. CDT2000 utilizes the industry standard NDIR measurement principle with self-calibrating ABC-logic™ for CO₂ measurement. CDT2000-DC is a dual channel model with a measuring channel and a reference channel that makes a continuous comparison and the necessary adjustment accordingly. CDT2000-DC is also suitable for buildings that are continuously occupied.

USAGE & APPLICATIONS

CDT2000 Duct is used to monitor and control CO₂ concentration of incoming and return air in a ventilation system. CDT2000-DC Duct series devices can also be used in applications where there is a constant source of carbon dioxide present (for example hospitals and greenhouses).

TECHNICAL DETAILS

Accuracy:	CO ₂ : ±40 ppm + 2 % of reading, DC model: 75 ppm or 10 % of reading (whichever is greater) Temperature: <0.5 °C
Measurement elements:	NTC10k temperature sensor, Non Dispersive Infrared (NDIR) CO ₂ sensor
Measuring units:	ppm, °C
Calibration:	Automatic self-calibration, ABC Logic™ or continuous comparison (DC)
Supply voltage:	24 VDC/VAC ±10 %
Current consumption:	max 230 mA (at 24 V) + 10 mA for each voltage output
Output signal 1:	0/2...5/10 V (linear to CO ₂), L min 1 kΩ
Output signal 2:	0/2...5/10 V (linear to T), L min 1 kΩ
Operating temperature:	0...+50 °C
Protection standard:	IP54

CDT DUCT

Example:	Product series		
	CDT2000 Duct-D	CDT2000	Carbon dioxide transmitter, analog outputs
	CDT-MOD-2000	Carbon dioxide transmitter, Modbus communication	
		Calibration	
		ABC logic™, Automatic Background Calibration	
		-DC	Dual channel, for continuously occupied space
		Mounting	
		Duct	Duct mount
			Display
		-D	With display
			Without display
Model	CDT2000	Duct	-D



MEASURE THE TOTAL CONCENTRATION OF CO₂ WHERE ROOM MEASUREMENT IS NOT POSSIBLE

HUMIDITY TRANSMITTERS

RHT series devices measure relative humidity (rH) and temperature. They are available for duct or wall mounting. The configuration and adjustment of the RHT is quick and easy because of the large touchscreen display. RHT Duct is a user-friendly solution for measuring relative humidity in air ducts.



RHT



RHT DUCT

RHT	Wall mount humidity (rH) and temperature transmitter	42
RHT DUCT	Humidity (rH) and temperature transmitter for duct	44



HUMIDITY TRANSMITTERS

WALL MOUNTED



**TOUCHSCREEN
DISPLAY FOR EASY
ADJUSTMENT**

RHT RHT is a wall mounted relative humidity and temperature transmitter that offers several different model options for easy customizability.

USAGE & APPLICATIONS RHT wall mount model is used to monitor and control relative humidity levels in offices, public spaces, hospitals, meeting rooms and classrooms.

TECHNICAL DETAILS

Accuracy:	Temperature: <0.5 °C Relative humidity: ±2...3 % rH at 0...50 °C and 10...90 % rH Total error band includes accuracy, hysteresis and temperature effect over 5...50 °C and 10-90 % rH
Measuring units:	°C, % rH
Measurement elements:	Pt1000 temperature sensor, thermoset polymer capacitive sensing element for humidity
Supply voltage:	24 VDC/VAC ±10 %
Current consumption:	max 90 mA (at 24 V) + 10 mA for each voltage output or 20 mA for each current output
Output signal 1:	0/2...10 V (linear to rH), L min 1 kΩ or 4...20 mA (linear to rH), L max 500 Ω
Output signal 2:	0/2...10 V (linear to Temp), L min 1k Ω or 4...20 mA (linear to Temp), L max 500 Ω
Optional relay output:	Potential free SPDT 250 VAC, 6 A / 30 VDC, 6 A with adjustable switching point and hysteresis
Operating temperature:	0...+50 °C
Protection standard:	IP20

RHT

Example:	Product series		
	RHT-1R-D	RHT	Relative humidity transmitter, analog outputs
	RHT-MOD	Relative humidity transmitter, Modbus communication	
		Mounting	
		Wall mount	
		Relay	
	-1R	With relay	
		Without relay	
		Display	
	-D	With display	
		Without display	
Model	RHT	-1R	-D



HUMIDITY TRANSMITTERS

DUCT MOUNTED



RHT DUCT

RHT DUCT is a duct mounted humidity and temperature transmitter available also with an illuminated display.

USAGE & APPLICATIONS

RHT DUCT is used to monitor and control relative humidity of incoming and return air in ventilation system.

TECHNICAL DETAILS

Accuracy:	Temperature: <0.5 °C Relative humidity: ±2...3 % rH at 0...50 °C and 10...90 % rH Total error band includes accuracy, hysteresis and temperature effect over 5...50 °C and 10-90 % rH
Measuring units:	°C, % rH
Measurement elements:	NTC10k temperature sensor, thermoset polymer capacitive sensing element for humidity
Supply voltage:	24 VDC/VAC ±10 %
Current consumption:	max 90 mA (at 24 V) + 10 mA for each voltage output
Output signal 1:	0/2...5/10 V (linear to rH), L min 1 kΩ
Output signal 2:	0/2...5/10 V (linear to T), L min 1 kΩ
Operating temperature:	0...+50 °C
Protection standard:	IP54

RHT DUCT

Example: RHT Duct-D	Product series		
	RHT	Relative humidity transmitter, analog outputs	
	RHT-MOD	Relative humidity transmitter, Modbus communication	
	Mounting		
	Duct	Duct mount	
		Display	
		-D	With display
			Without display
Model	RHT	Duct	-D



CARBON MONOXIDE TRANSMITTER



CMT

The CMT is an easy-to-use, reliable transmitter for detecting CO gas. It is commonly used in places where air includes CO gas, such as parking garages.

TECHNICAL DETAILS

Measuring unit:	ppm
Measuring range:	0...300 ppm CO
Measuring element:	Electro-chemical
Linearity:	≤2 % on 300 ppm CO
Cross sensitivity:	≤2 % on 300 ppm CO
Response time t90:	<60 s
Supply voltage:	20...28 VDC
Output signal:	4-20 mA (2-wire)
Operating temperature:	-10...40 °C
Protection standard:	IP54

SCREW FIXING MAKES REPLACING THE SENSOR EASY. THIS IS PARTICULARLY USEFUL WHEN THE DEVICE NEEDS CALIBRATING.

PRESSURE TRANSMITTERS FOR LIQUIDS

PTL

The PTL is a pressure transmitter for pressure detection in liquids for air-conditioning, heating and water systems. Suitable for plants that use refrigerants.



DPTL

The DPTL is made for differential pressure detection in liquids for air-conditioning, heating and water systems. The equipment can withstand mildly corrosive substances and liquids.



TECHNICAL DETAILS

Accuracy (from FS):	±1.0 %
Power:	15...24 VDC/VAC
Output:	0...10 V or 4-20 mA
Protection standard:	IP65
Pressure connector:	G1/4" (G1/2" adaptor included)
Operating temperature:	-40...105 °C

PTL

Example:	Product series		
	PTL-4-V	PTL	Pressure transmitter for liquids
		Measuring range (bar)	
		-4 0...4	
		-6 0...6	
		-10 0...10	
		-16 0...16	
		-25 0...25	
		Output	
		-V Voltage	
		-A Current	
Model	PTL	-4	-V

TECHNICAL DETAILS

Accuracy (from FS):	±1 %
Power:	15...24 VDC/VAC
Output:	0...10 V or 4-20 mA
Protection standard:	IP65
Pressure connector:	inside thread G1/4"
Operating temperature:	-10...50 °C

DPTL

Example:	Product series		
	DPTL-2,5-V	DPTL	Differential pressure transmitter for liquids
		Measuring range (bar)	
		-1 0...1	
		-2,5 0...2.5	
		-4 0...4	
		-6 0...6	
		Output	
		-V Voltage	
		-A Current	
Model	DPTL	-2	-V

PASSIVE TEMPERATURE SENSORS

NEW!

PTE series passive temperature sensors are engineered for HVAC applications. The design approach has been to offer user-friendly and premium quality products with economical pricing.

PTE products are available with the following sensor types:

- NTC10k
- NTC20k
- Pt1000
- Ni1000
- Ni1000-LG

PTE-DUCT	Duct temperature sensor.....	52
PTE-ROOM	Room temperature sensor.....	54
PTE-CABLE	Cable temperature sensor.....	56
PTE-O/OI	Outside air temperature/illuminance sensor	58



PTE-DUCT



PTE-CABLE



PTE-O



PTE-OI



PTE-ROOM

PASSIVE TEMPERATURE SENSORS

DUCT TEMPERATURE SENSOR FOR HVAC APPLICATIONS




PTE-DUCT

PTE-DUCT is a passive temperature sensor engineered for HVAC applications. PTE-DUCT is used to sense air temperature inside a ventilation duct. The temperature sensor is housed inside a stainless steel tube that protects it from the environment and condensation, ensuring long service life.

USAGE & APPLICATIONS

PTE-DUCT is commonly used in HVAC systems for measuring air temperature in ventilation ducts in offices, hospitals, schools etc.

TECHNICAL DETAILS

Accuracy:	NTC10k ± 0.25 °C @ 25 °C NTC20k ± 0.25 °C @ 25 °C Pt1000 ± 0.3 °C @ 0 °C Ni1000 ± 0.4 °C @ 0 °C Ni1000-LG ± 0.4 °C @ 0 °C
Operating temperature:	-50 ... +50 °C
Sensor tube length:	190 mm
Sensor tube outer diameter:	7 mm
Protection class:	IP54

PTE-DUCT

Example: PTE-Duct-NTC10	Product series	
	PTE	Passive temperature sensor for gas
	Installation type	
	-Duct	Duct
	Sensor element	
	-NTC10	10 KΩ @ 25 °C
	-NTC20	20 KΩ @ 25 °C
	-Pt1000	1000 Ω @ 0 °C
	-Ni1000	1000 Ω @ 0 °C
	-Ni1000-LG	1000 Ω @ 0 °C
Model	PTE	-Duct -NTC10

PASSIVE TEMPERATURE SENSORS

ROOM TEMPERATURE SENSOR FOR HVAC APPLICATIONS

NEW!



PTE-ROOM

PTE-ROOM is a passive temperature sensor engineered for HVAC applications. PTE-ROOM is used to sense air temperature indoors. The temperature sensor is housed in a modern white plastic housing. PTE-ROOM is particularly easy to install. The cover can be opened without tools and the cable can be routed from behind or above/below the installation surface. PTE-ROOM can be installed on top of a standard electrical switch box.

USAGE & APPLICATIONS

PTE-ROOM is commonly used in HVAC systems for measuring indoor air temperature in offices, hospitals, schools etc.

TECHNICAL DETAILS

Accuracy:	NTC10k ± 0.25 °C @ 25 °C NTC20k ± 0.25 °C @ 25 °C Pt1000 ± 0.3 °C @ 0 °C Ni1000 ± 0.4 °C @ 0 °C Ni1000-LG ± 0.4 °C @ 0 °C
Operating temperature:	-10 ... +50 °C
Housing material:	ABS
Housing dimensions:	80.0 x 75.0 x 27.5 mm
Protection class:	IP20

PTE-ROOM IS PARTICULARLY EASY TO INSTALL


PTE-ROOM

Example: PTE-Room-NTC10	Product series	
	PTE	Passive temperature sensor for gas
	Installation type	
	-Room	Room
	Sensor element	
	-NTC10	10 KΩ @ 25 °C
	-NTC20	20 KΩ @ 25 °C
	-Pt1000	1000 Ω @ 0 °C
	-Ni1000	1000 Ω @ 0 °C
	-Ni1000-LG	1000 Ω @ 0 °C
Model	PTE	-Room -NTC10

PASSIVE TEMPERATURE SENSORS

CABLE SENSOR FOR HVAC APPLICATIONS

NEW!

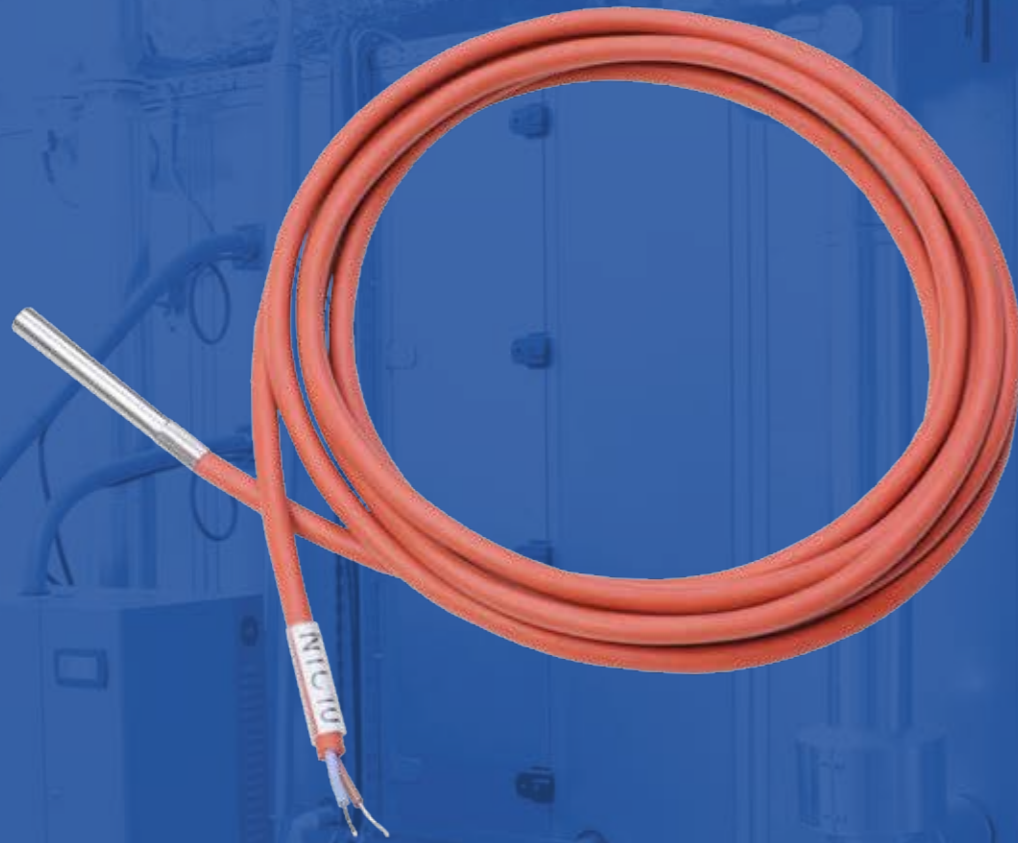

PTE-CABLE

PTE-CABLE is a passive temperature sensor engineered for HVAC applications. PTE-CABLE senses temperatures in a wide range. It is well protected from the environment by its stainless steel sleeve which is crimped on to premium quality silicone rubber cable. Inside the sleeve, the temperature sensor is protected against condensation, ensuring long service life. The cable is halogen-free and oil resistant. PTE-CABLE has a high protection rating of IP67.

USAGE & APPLICATIONS

PTE-CABLE is commonly used in HVAC systems for measuring temperature in ventilation units, hard-to-reach places or harsh environments.

TECHNICAL DETAILS

Accuracy:	NTC10k ± 0.25 °C @ 25 °C NTC20k ± 0.25 °C @ 25 °C Pt1000 ± 0.3 °C @ 0 °C Ni1000 ± 0.4 °C @ 0 °C Ni1000-LG ± 0.4 °C @ 0 °C
Operating temperature:	-60 ... +180 °C
Short-term temperature:	up to +250 °C
Materials:	Sleeve: Stainless steel Cable: Silicone rubber
Sleeve dimensions:	Outer diameter: 6 mm Length: 50 mm
Cable length:	2.0 m (Custom lengths available upon request)
Protection class:	IP67

PTE-CABLE HAS A HIGH PROTECTION RATING OF IP67

PTE-CABLE

Example: PTE-Cable-NTC10	Product series	
	PTE	Passive temperature sensor for gas
	Installation type	
	-Cable	Cable
	Sensor element	
	-NTC10	10 KΩ @ 25 °C
	-NTC20	20 KΩ @ 25 °C
	-Pt1000	1000 Ω @ 0 °C
	-Ni1000	1000 Ω @ 0 °C
	-Ni1000-LG	1000 Ω @ 0 °C
Model	PTE	-Cable -NTC10

PASSIVE TEMPERATURE SENSORS

NEW!

OUTSIDE AIR TEMPERATURE/ILLUMINANCE SENSOR FOR HVAC APPLICATIONS



PTE-O/OI

PTE-O is a passive temperature sensor engineered for HVAC applications. PTE-O is used to sense outside air temperature. The temperature sensor is housed inside a stainless steel sleeve that protects it from the environment and condensation, ensuring long service life.

PTE-OI is a combination of a passive temperature and an illuminance sensor engineered for HVAC applications. It is used to sense outside air temperature and ambient lighting conditions. In addition to the outside air temperature, the PTE-OI includes an ambient illuminance sensor. The illuminance sensor is hermetically sealed for protection.

USAGE & APPLICATIONS

PTE-O is commonly used in HVAC systems for measuring outside air temperature and temperature in cold storages. PTE-OI is commonly used in HVAC systems for measuring outside air temperature and controlling the outside lightning of buildings.

TECHNICAL DETAILS

Accuracy:	NTC10k ± 0.25 °C @ 25 °C NTC20k ± 0.25 °C @ 25 °C Pt1000 ± 0.3 °C @ 0 °C Ni1000 ± 0.4 °C @ 0 °C Ni1000-LG ± 0.4 °C @ 0 °C
Operating temperature:	-50 ... +50 °C
Measuring range (OI only):	0...1000 lx
Protection class:	IP67

THE ILLUMINANCE SENSOR IS HERMETICALLY SEALED FOR PROTECTION

PTE-0/OI

Example: PTE-O-NTC10	Product series	
	PTE	Passive temperature sensor for gas
	Installation type	
	-O	Outside
	-OI	Outside with illuminance
Sensor element		
	-NTC10	10 KΩ @ 25 °C
	-NTC20	20 KΩ @ 25 °C
	-Pt1000	1000 Ω @ 0 °C
	-Ni1000	1000 Ω @ 0 °C
	-Ni1000-LG	1000 Ω @ 0 °C
Model	PTE	-O -NTC10

THE TEMPERATURE SENSOR IS HOUSED INSIDE A STAINLESS STEEL SLEEVE THAT PROTECTS IT FROM THE ENVIRONMENT AND CONDENSATION, ENSURING LONG SERVICE LIFE

DIFFERENTIAL PRESSURE GAUGE

DPG



**DPG WITH FLOW SCALE,
A COST-EFFECTIVE SOLUTION FOR
ON-SITE AIR FLOW MEASUREMENT**

DPG

The DPG is a standard pressure gauge for measuring overpressure and differential pressure.

USAGE

The DPG is used to measure low pressures of air and non-combustible gases mainly in HVAC systems.

APPLICATIONS

- monitoring filters and ventilators
- monitoring overpressure and pressure difference in air ducts, air handling units, cleanrooms and laminar flow cabinets
- monitoring air flow on ventilators and in air ducts (special flow scales available separately)

TECHNICAL DETAILS

Accuracy (from FS):	< ±2 % (DPG60 < ±4 % ; DPG100 < ±3 %)
Operating temperature:	-5...+60 °C
Zero point adjustment screw:	external in the plastic cover
Mounting:	surface mounting or flush mounting
Mounting position:	vertical
Measuring air flow:	special flow scales available separately, easy to install on site

Product description

DPG60
DPG100
DPG120
DPG200
DPG250
DPG300
DPG400
DPG500
DPG600
DPG800
DPG1K
DPG1.5K
DPG2K
DPG3K
DPG5K

Measuring range

0-60 Pa
0-100 Pa
0-120 Pa
0-200 Pa
0-250 Pa
0-300 Pa
0-400 Pa
0-500 Pa
0-600 Pa
0-800 Pa
0-1 kPa
0-1.5 kPa
0-2 kPa
0-3 kPa
0-5 kPa

INTERCHANGEABLE FLOW SCALES



Snap!



Install!



Go!

ACCESSORIES
SEE PAGE 70

LIQUID COLUMN MANOMETERS

MM, MMU & MMK



RELIABLE INCLINED COLUMN MANOMETER
WITH LEAKAGE PROTECTION SYSTEM



TRADITIONAL U-TUBE
MANOMETER WITH EASY
ZERO POINT CALIBRATION

EXTREMELY ROBUST
MANOMETERS USED
E.G. IN VESSELS



Liquid column manometers are reliable and inexpensive traditional pressure meters. The manometers are good for measuring and indicating small overpressure, vacuum and differential pressure of air and non-aggressive gases in low pressure ranges.

Liquid column manometers are ideal for general-purpose work in air-conditioning and ventilation, monitoring of air filters for contamination and monitoring of air flow and air velocity.

MM

Product	Measuring range	Accuracy
MM±50 *)	-50...0...+50 Pa	1 Pa
MM100 *)	-20...0...+100 Pa	1 Pa
MM±100500	-100...0...+500 Pa	5 Pa/25 Pa
MM200600	0...200...600 Pa	5 Pa/25 Pa

*) The types delivered with level bubble


Optional level bubble is available to all models on request!

MMK

Product	Measuring range	Accuracy
MM1K	0...1 000 Pa	10 Pa
MM1,5K	0...1 500 Pa	10 Pa
MM2K	0...2 000 Pa	10 Pa
MM3K	0...3 000 Pa	10 Pa
MM5K	0...5 000 Pa	10 Pa
MM7K	0...7 000 Pa	10 Pa
MM10K	0...10 000 Pa	10 Pa

MMU

Product	Measuring range	Accuracy
MMU±500	±500 Pa	10 Pa

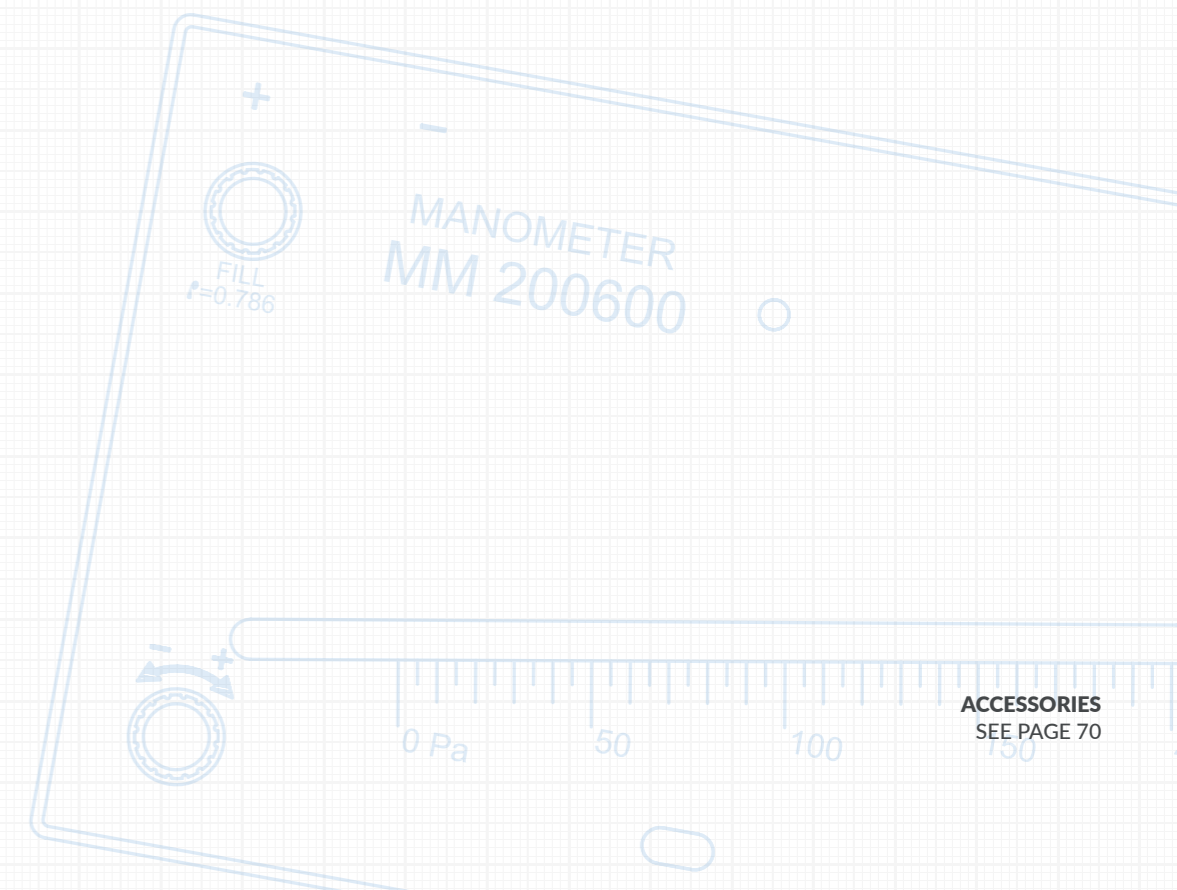

DIFFERENTIAL PRESSURE INDICATOR



**NEED AN ALARM?
SELECT DPI - A TRANSMITTER WITH
RELAY OUTPUT!**

DPI

The DPI is an electronic differential pressure transmitter with up to two relay outputs.

USAGE & APPLICATIONS

The differential pressure indicator is used for measuring and indicating low pressures of air and non-combustible gases in order to monitor and control building automation, HVAC and cleanroom systems.

TECHNICAL DETAILS

Accuracy (from FS):	±0.7 % (±1.5 % initial) (including: general accuracy, temperature drift, linearity, hysteresis, and repetition error)
Long term stability, typical 1 year:	±1 Pa (±8 Pa without autozero element -AZ)
Zero point calibration:	automatic with autozero element (-AZ) or by pushbutton
Supply voltage:	21-35 VDC / 24 VAC ±10 % (without -AZ option) 24 VDC ±10 % / 24 VAC ±10 % (with -AZ option)
Current consumption:	35 mA + relays (7 mA each) + AZ (20 mA) + 0...10 V output (10 mA)
Output signals:	0...10 V, L min 1 kΩ Relay output 1 (250 VAC / 30 VDC / 6 A) Optional relay output 2 (250 VAC / 30 VDC / 6 A)
Operating temperature:	-10...+50 °C
Response time:	0.5...10 s
Protection standard:	IP54

DPI

Example:	Product series			
DPI±500-2R-D	DPI	Differential pressure indicator		
		Measuring ranges (Pa)		
		±500	±100 / ±250 / ±300 / ±500	
		2500	100 / 250 / 1000 / 2500	
		Number of relays		
		-1R	One relay	
		-2R	Two relays	
		Zero point calibration		
		-AZ	With autozero calibration	
			Standard with pushbutton manual zero point calibration	
		Display		
		-D	With display	
Model	DPI	±500	-1R	-D

DIFFERENTIAL PRESSURE SWITCH



PS

The PS is a robust, easy-to-use differential pressure switch for air and non-combustible gases.

USAGE

The pressure switches are used in ventilation and air-conditioning systems to monitor changes in overpressure, vacuum and differential pressure.


APPLICATIONS

- monitoring filters and fans
- monitoring vacuum and overpressure in air ducts
- controlling defrosting functions

TECHNICAL DETAILS

Accuracy of switching point (low limit typ.):	±5 Pa (PS1500: ±10 Pa, PS4500: ±50 Pa)
Service life:	over 1 000 000 switching operations
Electrical rating (resistive load):	3 A / 250 VAC (PS200: 0.1 A / 250 VAC)
Electrical rating (inductive load):	2 A / 250 VAC (PS200: --)
Operating temperature:	-20...+60 °C
Protection standard:	IP54

Product	Measuring range
PS200	20...200 Pa
PS300	30...300 Pa
PS500	30...500 Pa
PS600	40...600 Pa
PS1500	100...1500 Pa
PS4500	500...4500 Pa

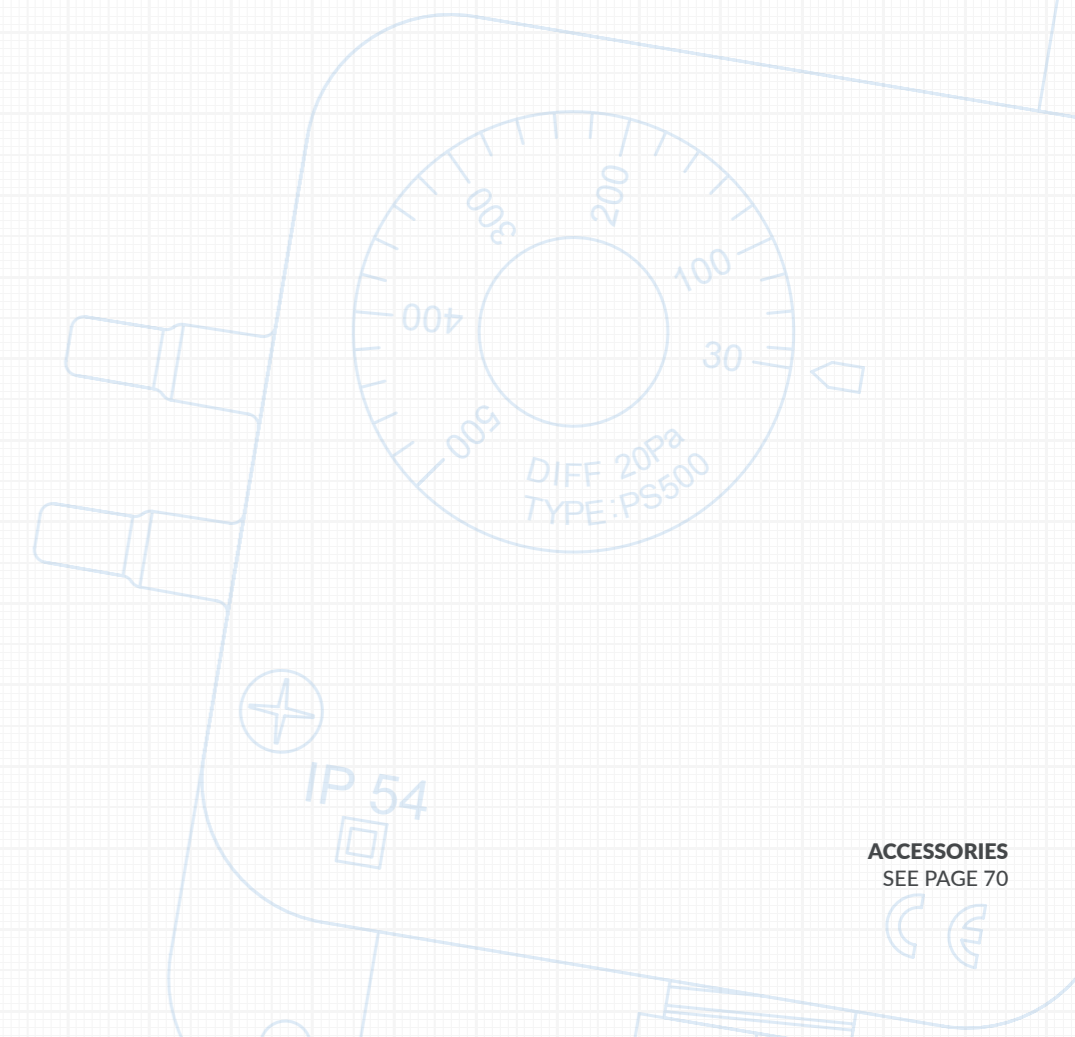

ACCESSORIES
SEE PAGE 70



FILTER ALERTS



The filter alerts are a solution for systems requiring visual indication of pressure on site, together with switching point signal. The filter alerts are ideal for general-purpose work in air-conditioning and ventilation, especially in monitoring of air filters for contamination.


The available combinations include pressure gauge and pressure switch combination (DPG/PS), and inclined tube manometer and pressure switch combination (MM/PS).

MM/PS

Product	MM range	PS range
MM200600/PS600	0... 600 Pa	40...600 Pa

DPG/PS

Product	DPG range	PS range
DPG200/PS200	0... 200Pa	20...200 Pa
DPG600/PS600	0... 600 Pa	40...600 Pa
DPG1,5K/PS1500	0...1500 Pa	100...1500 Pa

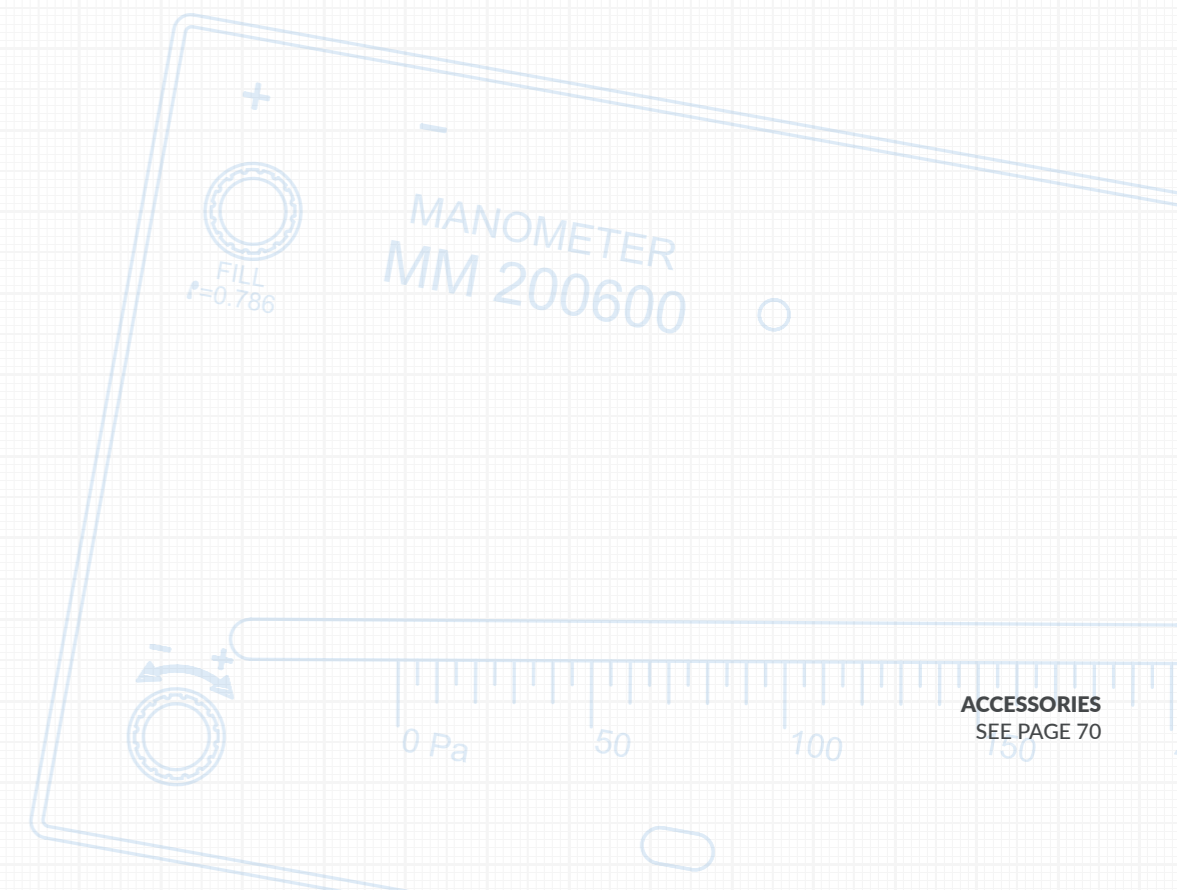

ACCESSORIES

	DPT (all models except 2W)	DPT-2W	DPT-FLOW	AVT	CDT / RHT	CDT / RHT DUCT	CMT	DPG	MM	MMU	MMK	DPI	PS	MM/PS	DPG/PS	DPTL	PTL	PTE-DUCT	PTE-ROOM	PTE-CABLE	PTE-O/OI
STANDARD ACCESSORIES																					
Product description																					
Mounting screw	x	x	x		x			x	x		x	x	x	x	x				x		x
PVC tube 2 m	x	x	x					x	x	x	x	x	x	x	x						
Duct connector, plastic for d=4 mm tube (80 mm)	x	x	x					x				x	x		x						
Gauge fluid 30 ml									x	x	x			x							
Attention stickers	x								x					x	x						
Adaptor G 1/4" to G1/2"																	x				
Mounting flange				x		x												x			
OPTIONAL ACCESSORIES																					
Product description																					
Calibration certificate (0, 50 %, 100 %)	x	x	x	x				x					x	x							
Display 4-digit		x		x																	
Display 2-line backlit (blue)	x		x			x															
PVC tube 4/7 2 m	x	x	x					x	x	x	x	x	x	x	x						
PVC tube 4/7 matt (100 m)	x	x	x					x	x		x	x	x	x	x						
Accessory pack (tube, duct connectors)	x	x	x					x	x	x	x	x	x	x	x						
Accessory pack for DPG flush mounting								x													
Gauge fluid 0,786; 30 ml (red)									x	x	x			x							
Gauge fluid 0,786; 250 ml (red)									x	x	x			x							
Gauge fluid 1,870; 30 ml (blue)									x					x							
Duct connector, plastic for d=4 mm tube (80 mm)	x	x	x					x	x	x	x	x	x	x	x						
Duct connector, metallic for d=4 mm tube (40 mm)	x	x	x					x	x		x	x	x	x	x						
Duct connector, metallic for d=4 mm tube (100 mm)	x	x	x					x	x		x	x	x	x	x						
T-connector for d=4 mm tube	x	x	x					x	x	x	x	x	x								
Mounting screw for PS/DPG/DPT ZN M4x20(1000 pcs)	x	x	x	x		x	x	x		x		x	x		x	x					
Flow scale								x							x						
Mounting plate																	x				
Junction box (including wiring work)	x																				
Adhesive backed mounting base and cable tie																					x

1. Applicability of the Terms and Conditions. These terms and conditions shall be applied to trade in devices, components and accessories between HK Instruments Oy and the customer, unless the parties have otherwise mutually agreed in writing. These conditions do not apply to trade by agents, to which the manufacturer's conditions of sale shall be applied.

2. Price. The prices in effect at the time the offer is made form the basis of pricing. All prices exclude VAT. If changes occur in customs, freight, VAT or other general payments related to the delivery before the date of delivery, the seller has the right to change the price of the goods in the same proportion that said changed prices or payments affected the price of the goods.

3. Offer. The seller's offer is binding and it is valid for 30 days unless otherwise agreed. Provided the seller's offer is tendered under intermediary terms and conditions of sale, an immediate in storage offer is denoted whereby the goods may be sold to a third party during the period the offer is valid and the seller does not guarantee the inventory is sufficient.

4. Contract. A contract between the seller and the buyer is deemed to have been established when

- the parties have signed a written contract (purchase agreement)
- the buyer has approved a binding offer in writing (order) or
- the seller has confirmed in writing as such an order other than one based on an offer or an order different from the offer (order confirmation)

5. Drawings and Descriptions. The information on prices, measurements, weights and performances given in descriptions, photos, memos, drawings, directories and price lists and other information containing technical and other details have been given without obligations, unless specifically referred to in the offer. All technical drawings and documents needed for the manufacture of the product or its component, which one party has provided to the other party prior to, or after the signing of the contract, shall remain the property of the provider. The receiving party may not, without the provider's consent, use, copy, surrender or divulge by other means information regarding them to a third party.

6. Condition of Delivery. The condition of delivery is free seller's storage (re: Incoterms 2010 EXW) unless otherwise agreed.

7. Packaging. The prices stated in price lists and directories apply to unpacked products.

8. Time of Delivery. Unless the time of delivery is agreed, the seller shall stipulate the time of delivery. The goods are considered to have been delivered when handed over to a freight carrier for forwarding to the purchaser. When, according to the terms of the contract, the buyer has to collect the goods from the seller or from a place designated by the seller, the goods are deemed conveyed when the seller has notified the buyer that the goods are ready for delivery.

9. Conveyance and Examination of the Goods. On acceptance of the goods, the customer must make sure that the delivered goods correspond with the packing list and are externally undamaged. Before using, connecting, or installing the goods, the customer must again examine the goods to ensure their flawless condition. Complaints regarding errors or deficiencies must be made to the seller without delay, at the latest within 8 days of the conveyance of the goods.

10. Force Majeure. The seller is not liable to fulfill the contract if an obstacle the seller is unable to overcome exists regarding the contract, or if fulfilling the contract would require sacrifices that are unreasonable compared to the advantage for the buyer should the seller fulfill the contract. If said obstacle or disparity ceases to exist within a reasonable period of time, the buyer has the right to demand that

the seller fulfill the contract. When the manufacturer or the party from which the seller obtains the goods has not fulfilled the terms of his contract thus causing the seller's delivery to be delayed or not completed, the seller is not obligated to compensate the buyer for any potential losses. The buyer does not have the right to request a new delivery to replace a flawed product if an obstacle as noted in this section exists for the seller. When completion of the contract within a reasonable period of time becomes impossible due to factors noted in this section, both parties are entitled to cancel the contract with no liability to compensate by notifying the other party of their intentions in writing.

11. Payment. The payment period starts from the invoice date. In case of a delay in payment, the buyer is liable for compensating the seller according to his/her rate of interest and paying the expenses arising from the collection of payment.

12. Warranty. The seller is obligated to provide a warranty of five (5) years for the delivered goods regarding material and manufacturing. The warranty period is considered to start on the delivery date of the product. If a defect in raw materials or a production flaw is found, the seller is obligated, when the product is sent to the seller without delay or before expiration of the warranty, to amend the mistake at his/her discretion either by repairing the defective product or by delivering free of charge to the buyer a new flawless product and sending it to the buyer. Delivery costs for repair under warranty will be paid by the buyer and the return costs by the seller. The warranty does not comprise damages caused by accident, lightning, flood or other natural phenomenon, normal wear and tear, improper or careless handling, abnormal use, overloading, improper storage, incorrect care or reconstruction, or changes and installation work not done by the seller or his/her authorized representative. The selection of materials for devices prone to corrosion is the buyer's responsibility, unless otherwise is legally agreed upon. Should the manufacturer alter the structure of the device, the seller is not obligated to make comparable changes to devices already purchased. Appealing for warranty requires that the buyer has correctly fulfilled his/her duties arisen from the delivery and stated in the contract. The seller will give a new warranty for goods that have been replaced or repaired within the warranty, however only to the expiration of the original product's warranty time. The warranty includes the repair of a defective part or device, or if needed, a new part or device, but not installation or exchange costs. Under no circumstance is the seller liable for damages compensation for indirect damage.

13. Returns. The sale made is binding and irrevocable and the seller is not liable to accept the return of a product. Products delivered according to contract are taken back and products reimbursed up to 70% provided the seller has, prior to the return of the product, agreed to it. Returned products may be taken back and credited provided they are in the original package and in original condition.

14. Notifications. The sender is responsible for ensuring the arrival of notifications sent to the other party.

15. Ownership. Ownership of the product is passed to the buyer when the price is paid in full.

16. Disagreements. Disagreements concerning contracts and related stipulations should be settled primarily by the parties to the contract. In case a settlement cannot be reached, the dispute shall be resolved in Finland in the lower court at the domicile of the seller.



HK INSTRUMENTS

– USER-FRIENDLY MEASURING DEVICES

HK Instruments is a Finnish company specialized in manufacturing and developing technologically advanced measuring devices for HVAC applications. Our devices are primarily used in air handling systems and building automation.

30 years of experience and exports to more than 45 countries prove our high-class product development and cost-effective manufacturing. We have invested in practical user interfaces and that is why the installation of our devices is extremely easy and fast.

HK INSTRUMENTS



Keihästie 7
FIN-40950 MUURAME
FINLAND

Phone. +358 14 337 2000
Fax. +358 14 337 2020

info@hkinstruments.fi
www.hkinstruments.fi