



Foot switches with thermoplastic enclosure


KF 1S - 5m

Material number: 1049198 (Material number old: 88157908)

Features/Options

- Thermoplastic enclosure
- Small flat design
- 1 Reed contact (1 NO contact)
for low currents from 1 mA to 1 A
- With pre-wired cable, cable length 5 m

Dimensions

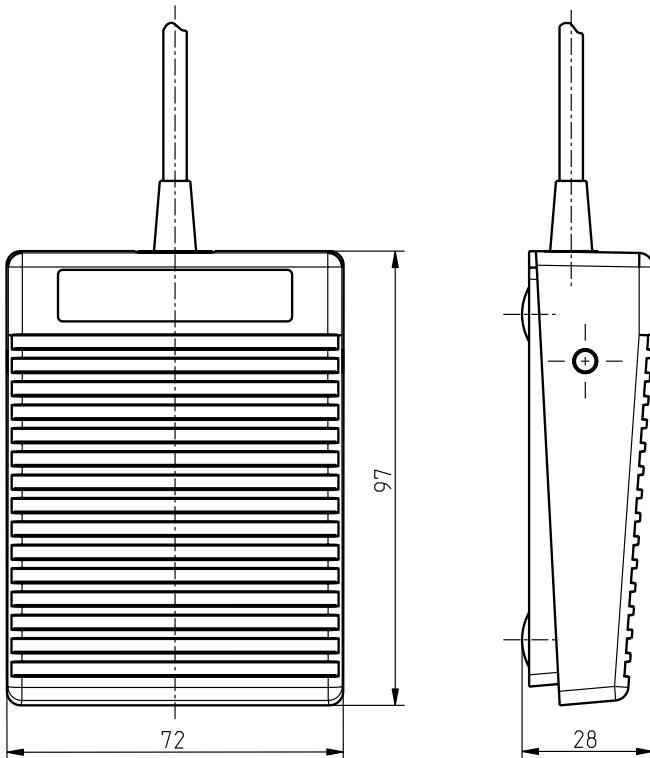

Technical data

Standards
Enclosure

EN 60947-5-1; VDE 0660 part 200
polyamide 66 glass-fibre

Pedal

reinforced, self-extinguishing
glass-fibre reinforced
thermoplastic (PA 66)

Connection

cable AWG, length 5 m

Cable cross-section

2-core: AWG 20: 0.52 mm²

Degree of protection

IP 65 to IEC/EN 60529

Switching system

Reed contact: 1 NO contact

Switching voltage

12 ... 250 VAC/DC

Max. switch-on current

1 A

Max. switch-on power

30 VA

Ambient temperature

-10 °C ... +60 °C

Mechanical life

> 1 million operations

Approvals



Weight

304 g

Errors and omissions excepted.

Contact diagram

