



Foot switches with thermoplastic enclosure


KF 1W - 2m

Material number: 1049279 (Material number old: 88158003)

Features/Options

- Thermoplastic enclosure
- Small flat design
- Reed contacts (1-pole change-over contact) for low currents from 1 mA to 1 A
- With pre-wired cable, cable length 2 m

Dimensions

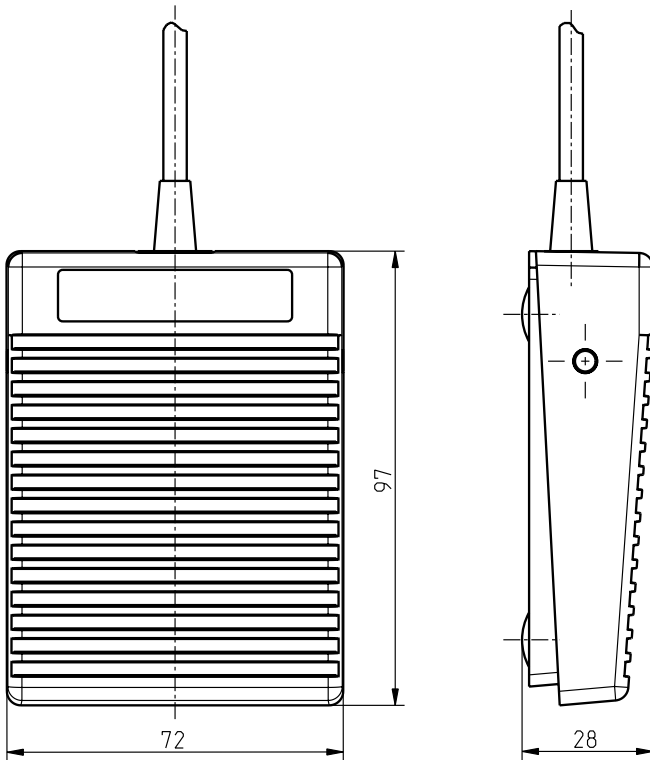

Technical data

| | |
|---------------------------------------|---|
| Standards | EN 60947-5-1; VDE 0660 part 200 |
| Enclosure | polyamide 66 glass-fibre reinforced, self-extinguishing |
| Pedal | glass-fibre reinforced thermoplastic (PA 66) |
| Connection | cable AWG, length 2 m |
| Cable cross-section | 3-core: AWG 20: 0.52 mm ² |
| Degree of protection | IP 65 to IEC/EN 60529 |
| Switching system | Reed contact: 1-pole change-over contact |
| Switching voltage | 12 ... 250 VAC/DC |
| Max. switch-on current | 1 A |
| Max. switch-on power | 30 VA |
| Ambient temperature | -10 °C ... +60 °C |
| Mechanical life | > 1 million operations |
| Approvals | |
| Weight | 140 g |
| Errors and omissions excepted. | |

Contact diagram

