

### Datasheet

Subject to technical alteration  
Issue date: 07.09.2018 • A002



Illustration similar

### Application

Ceiling flush-mounted sensor for surface temperature measurement in room, office spaces and other workplaces. Using the infrared measuring principle, an averaged temperature over the circular detection range (optical detection range  $80 \pm 5^\circ$ ) is performed. If two IR sensors are used, the mean, minimum or maximum value of both temperature signals can be provided in addition to the individual temperatures of each sensor (configurable via Thermokon USEapp).

### Types Available

#### Ceiling flush mount sensor temperature – active 0..10 V | 4..20mA

RDF-IR V L1500  
RDF-IR A L1500

#### Ceiling flush mount sensor temperature – active 2x 0..10 V | 2x 4..20 mA

RDF-IR VV L1500  
RDF-IR AA L1500

#### Ceiling flush mount sensor temperature – active 2x 0..10 V + Relay

RDF-IR VV L1500 Relay

### Security Advice – Caution



The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

## Notes on Disposal



As a component of a large-scale fixed installation, Thermokon products are intended to be used permanently as part of a building or a structure at a pre-defined and dedicated location, hence the Waste Electrical and Electronic Act (WEEE) is not applicable. However, most of the products may contain valuable materials that should be recycled and not disposed of as domestic waste. Please note the relevant regulations for local disposal.

## Technical Data

<b>Measuring values</b>	surface temperature	
<b>Output voltage</b>	1x/2x 0..10 V or 0..5 V (adjustable via jumper; live-zero configuration via Thermokon USEapp), min. load 10 k $\Omega$	
<b>Output ampere</b> (type-dependent)	<b>A   AA</b> 1x/2x 4..20 mA, max. load 500 $\Omega$	
<b>Output switch contact</b> (type-dependent)	<b>Relay</b> 2x floating contact NO for 24 V ~ or 24 V = / 3 A	
<b>Power supply</b> (type-dependent)	<b>V   VV   Relay</b> 15..35 V = or 19..29 V ~ SELV	<b>A   AA</b> 15..35 V = SELV
<b>Power consumption</b>	typ. 0,6 W (24 V =)   1,5 VA (24 V ~)	
<b>Output signal range temperature</b> *Scaling analogue output	0..+50 °C (default setting) selectable from 4 temperature ranges -40..+60 °C   0..+50 °C   -20..+80 °C   -15..+35 °C adjustable at the transducer	
<b>Operating temperature range</b> * Max. permissible operating temperature	-20..+70 °C	
<b>Accuracy Temperature</b>	$\pm 0,5$ K (typ.at 21 °C within default measuring range) mounting height max. 7 m, > 7m $\pm 1,5$ K	
<b>Sensor</b>	PIR (passive infrared), optical aperture angle (50% sensitivity): 80 $\pm 5^\circ$ Emissivity = 1.0, other values on request	
<b>Enclosure</b>	enclosure USE-M, PC, pure white	
<b>Protection</b>	IP30 according to EN 60529	
<b>Cable entry</b> (type-dependent)	<b>V(V)   A(A)</b> Flextherm M16, for wire $\varnothing=3..7$ mm, removable	<b>Relay</b> M25 with fourfold cable entry for wire with max. $\varnothing=7$ mm, removable
<b>Connection electrical</b>	removable plug-in terminal, max. 2,5 mm <sup>2</sup> , sensor wire length=1,5 m (default), max. 10 m, plug RJ45	
<b>Ambient condition</b>	max. 85% rH short term condensation	



### Declaration of conformity

The declaration of conformity of the products can be found on our website <https://www.thermokon.de/>.

## Configuration



**The Thermokon bluetooth dongle with micro-USB is required for communication between USEapp and USE-M / USE L (Item No.: 668262). Commercial bluetooth dongles are not compatible.**



Application-specific reconfiguration of the devices can be performed using the Thermokon USEapp. The configuration can be performed only when the device is powered



**The configuration-app and the app description can be found in the Google Play Store or in the Apple App Store.**

## Application notice




The housing cover must be completely closed in order to ensure the accuracy and reproducibility of the measured values during a test or service log via USEapp.

The Bluetooth dongle snaps into the socket easily. When removing, please fix the plug-in card (option PCB) so that it is not unintentionally pulled out.

The ceiling flush mounted sensor is installed in a 26 mm diameter hole.

## Application

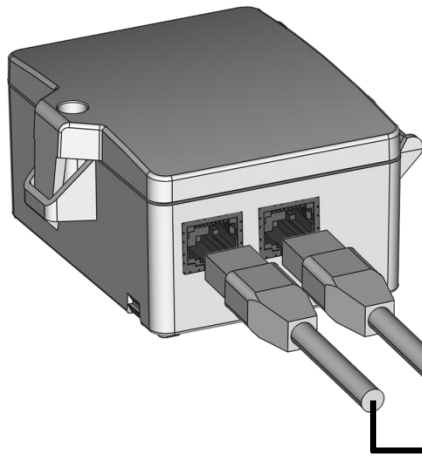


Two RJ45 sockets are integrated, instead of permanently connected cables. This allows 2 temperature sensors to be connected with a shielded RJ45 cable of up to 10 m in length. The user can independently extend the basic versions with one temperature sensor (RDF-IR V | RDF-IR A) with a second temperature sensor.


- Sensor 2 (Output temperature 2)
- Sensor 1 (Output temperature 1)

## Connection Plan

### RDF-IR V | RDF-IR Dual VV

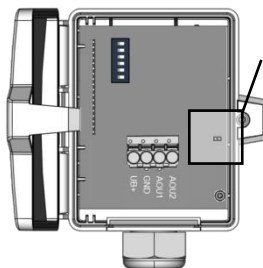


0.5 V  
0..10 V




(temperature 2 | 0..10 V) optional, if sensor 2 connected  
(temperature 1 | 0..10 V)  
(15..35 V = or 19..29 V ~)

### RDF-IR A | RDF-IR Dual AA

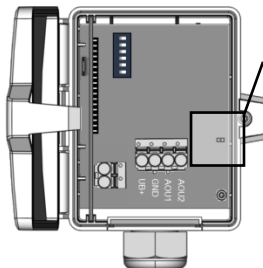

0.5 V  
0..10 V




(temperature 2 | 0..10 V) optional, if sensor 2 connected  
(temperature 1 | 0..10 V)  
(15..35 V =)




(temperature 2 | 4..20 mA) optional, if sensor 2 connected  
(temperature 1 | 4..20 mA)


### RDF-IR V Relay | RDF-IR Dual VV Relay

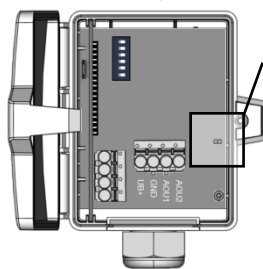

0.5 V  
0..10 V




(temperature 2 | 0..10 V) optional, if sensor 2 connected  
(temperature 1 | 0..10 V)  
(15..35 V = or 19..29 V ~)



(Relay 2 | NO)  
(Relay 1 | NO)


## DIP switch configuration

### DIP 1..3




#0  
reserved


### Measuring range - DIP 4,5




#0 (factory default)  
SI = 0..+50 °C  
IMP = +40..+140 °F



#8  
SI = -20..+80 °C  
IMP = 0..+200 °F




#16  
SI = -40..+60 °C  
IMP = -40..+160 °F




#24  
SI = -15..+35 °C  
IMP = 0..+100 °F

### System of units - DIP 6







#0 (factory default)  
SI



#32  
IMP

## Dimensions (mm)

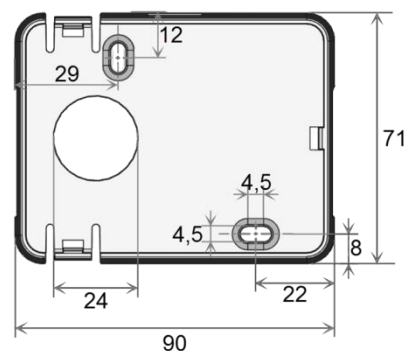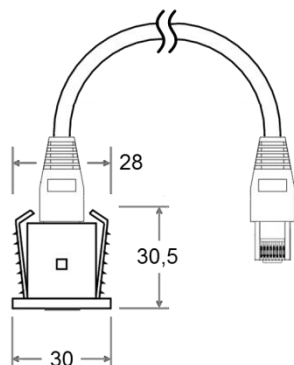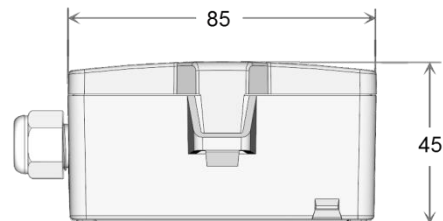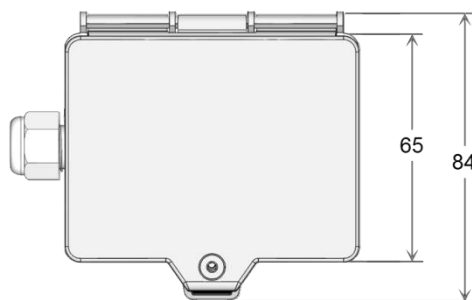

## Accessories (included in delivery)

Mounting base

Item No. 631228

Mounting kit universal

Item No. 698511

• Cover screw + screw cover • 2 Rawplugs • 2 Screws (countersunk head) • 2 Screws (rounded head)

## Accessories (optional)

Bluetooth dongle

Item No. 668262

Cable entry M25 USE white, sealing insert 4x Ø=7 mm (4 pcs)

Item No. 641364