



## Foot switches with thermoplastic enclosure


### KF 1S - 2m

Material number: 1049191 (Material number old: 88157004)

#### Features/Options

- Thermoplastic enclosure
- Small flat design
- 1 Reed contact (1 NO contact)  
for low currents from 1 mA to 1 A
- With pre-wired cable, cable length 2 m

#### Dimensions

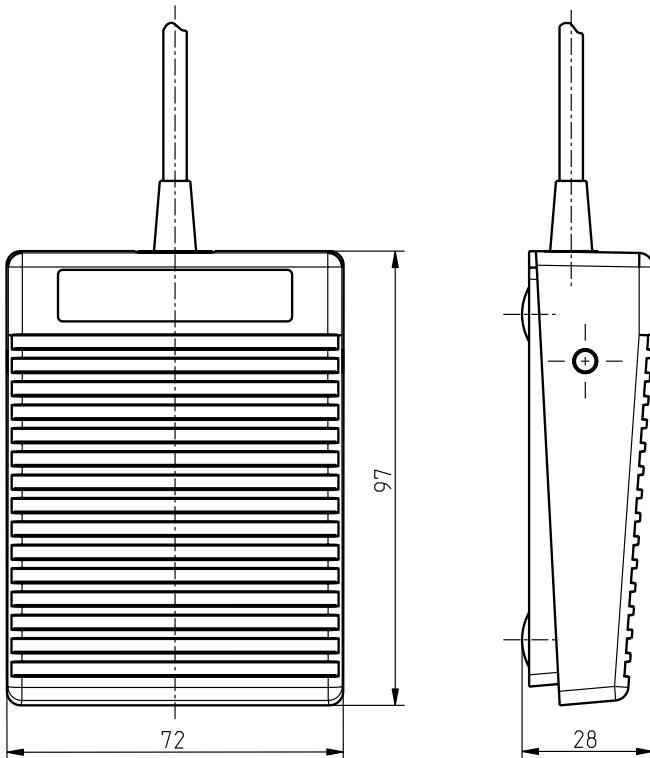

#### Technical data

Standards  
Enclosure

EN 60947-5-1; VDE 0660 part 200  
polyamide 66 glass-fibre

Pedal

reinforced, self-extinguishing  
glass-fibre reinforced

Connection

thermoplastic (PA 66)  
cable AWG, length 2 m

Cable cross-section

2-core: AWG 20: 0.52 mm<sup>2</sup>

Degree of protection

IP 65 to IEC/EN 60529

Switching system

Reed contact: 1 NO contact

Switching voltage

12 ... 250 VAC/DC

Max. switch-on current

1 A

Max. switch-on power

30 VA

Ambient temperature

-10 °C ... +60 °C

Mechanical life

> 1 million operations

Approvals



Weight

200 g

Errors and omissions excepted.

#### Contact diagram

