



Foot switches with thermoplastic enclosure

KF 2 1S/1S


Material number: 1049006 (Material number old: 87168003)

Features/Options

- 2-pedal type
- Thermoplastic enclosure
- Small flat design

- Wiring compartment
- Reed contacts (1 NO contact per pedal)
for low currents from 1 mA to 1 A

Dimensions

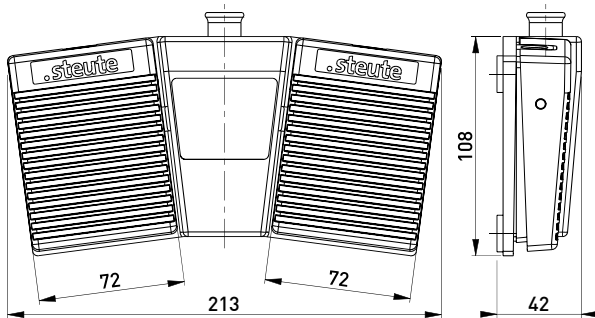

Technical data

Standards	EN 60947-5-1; VDE 0660 part 200
Enclosure	polyamide 66 glass-fibre reinforced, self-extinguishing
Pedal	glass-fibre reinforced thermoplastic (PA 66)
Connection	wiring compartment, cable gland M12 x 1.5
Cable cross-section	max. AWG 22: 0.33 mm ² , cable: ø max. 6.5 mm
Degree of protection	IP 65 to IEC/EN 60529
Switching system	reed contacts: 1 NO contact per pedal
Switching voltage	12 ... 250 VAC/DC
Max. switch-on current	1 A
Max. switch-on power	30 VA
Ambient temperature	-10 °C ... +60 °C
Mechanical life	> 1 million operations
Approvals	

Contact diagram



Weight



460 g

Errors and omissions excepted.