




Wireless multifunction handle RF TGM SW868-S Material number: 1435042

Features/Options:

- Metal enclosure
- sWave® wireless technology
- 1 push-button
- Collars (blue, red, green, black, grey) are included in delivery
- No wiring and pipe laying required
- Power supply by Lithium battery
- Easy programming of receiver
- Output signal can be individually configured at the receiver

Dimensions

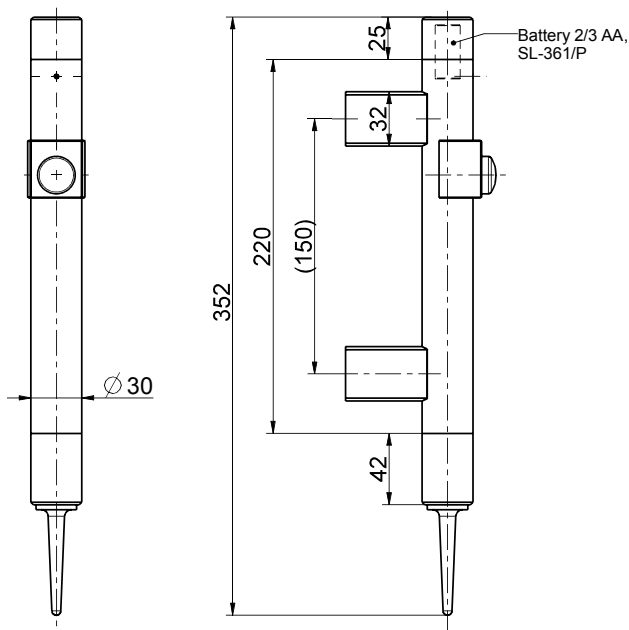

Technical data

Standards	EN 60947-5-1; EN 61000-6-2, -6-3, EN 61000-4-2, -4-20; EN 301 489-1; EN 301 489-3; EN 300 220-1; EN 300 220-2
Enclosure	Stainless steel 1.4301 (V2A)
Degree of protection	IP 67 to IEC/EN 60529
Switching system	push-button
Protocol	sWave®
Ambient temperature	-20 °C ... +65 °C
Switching frequency	max. 5 Hz
Voltage supply	battery 2/3 AA, SL-361/P, 1.6 Ah, battery incl. battery enclosure replaceable
Frequency	868.3 MHz
Transmission power	< 25 mW
Data rate	66 kbps
Channel bandwidth	266 kHz
Wireless range	max. 450 m outside, max. 40 m inside
Mechanical life	> 1 million operations
Battery life	> 800 000 operations
Actuating time	min. 80 ms
Note	status signal configurable ex works, transmission of battery voltage