

cegard/Mini family

Product overview

CEDES
More than you expect!




cegard/Mini

Although optimized for static applications, the cegard/Mini can also be used for dynamic ones. Its compact edges feature an integrated controller and connection cable which allow the light curtain to be easily and quickly installed. The system has a short-circuit-proof semiconductor PNP/NPN output. Combined with a selectable output logic, the cegard/Mini is extremely versatile. The integrated LED display, always clearly visible, indicates the system's status at all times. The cegard/Mini is a proven light curtain, unbeatable in terms of quality and reliability.



Dynamic application

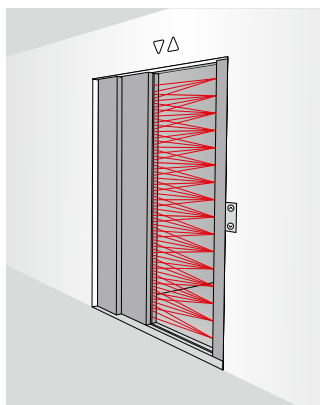

Static application





Features

- Very robust and reliable thanks to proven technology
- Low power consumption
- Integrated controller with LED indicator
- Short-circuit proof semiconductor output PNP/NPN (push-pull)
- Selectable output logic
- No earth necessary
- Edges available in either natural or black anodized aluminum



cegard/Mini-CC

The cegard/Mini-CC is the latest addition to the top-selling light curtain range from CEDES. As the name suggests, this version offers criss-cross beams, which remain fully active until the doors it is safeguarding are completely closed. This feature, combined with its robust design, make the cegard/Mini-CC ideal for both static and dynamic mounting. It features PNP/NPN (Push-Pull) semiconductor output while the output logic can be connected to the light curtain via a lead. This light curtain can be both front and side mounted. No competitor light curtain offers the features, ease-of-installation, robustness and reliability offered by the CEDES top-seller.

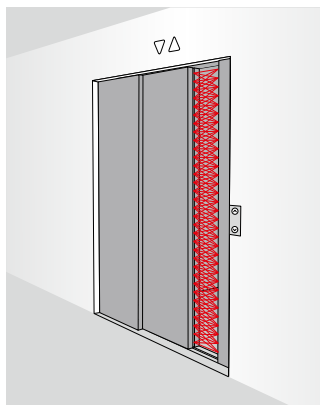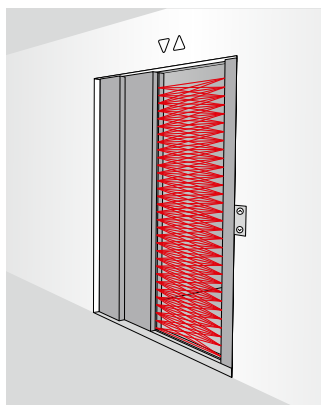

Dynamic application - criss-cross beams active up to complete door closure

Features

- Criss-cross light beams remain fully active until the doors are completely closed
- Low power consumption
- Integrated controller with LED indicator
- Short-circuit proof semiconductor output PNP/NPN (push-pull)
- Selectable output logic
- No earth necessary




cegard/Mini-MOD


The cegard/Mini-MOD (for modernization) features the proven and ultra-reliable cegard/Mini light curtain with the universal power supply UPS. This package is the ideal solution when it comes to elevator modernization as integrating the light curtain is quick, easy and cost-efficient. Its operating range and universal voltage of 20 ... 265 VAC/DC, together with the potential-free relay output, means it can be quickly and easily integrated into existing facilities.



Dynamic application

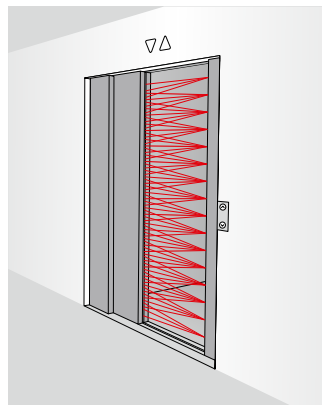

Static application

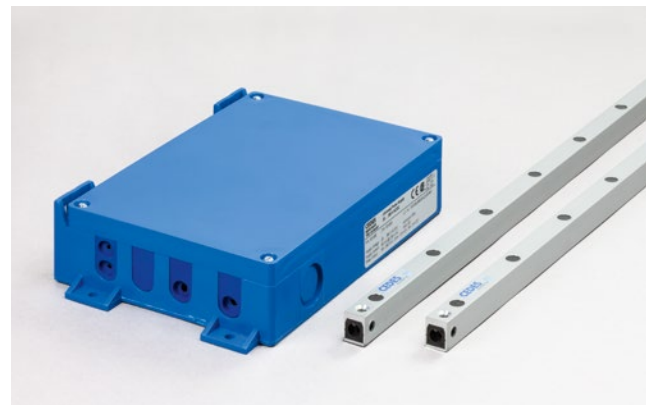

Features

- Can be installed anywhere thanks to its range and universal voltage range 20 ... 265 VAC/DC
- Relay output for easy integration into existing systems
- Ideal for retrofitting using different optimized door mounting kits
- Status indication integrated in the edge
- IP67 edges version available
- Edges available in either natural or black anodized aluminum



cegard/Mini

cegard/Mini-CC

cegard/Mini-MOD



Technical data

Type	Comfort light curtain	Comfort light curtain	Comfort light curtain
Range (in m)	0 ... 4	0 ... 4	0 ... 4
Maximum ambient light (in Lux)	100,000	100,000	100,000
Monitored height (in mm)	1,800	1,800	1,630 / 1,800 / 1,822
Typical response time (in ms)	70 with 16 elements 120 with 32 elements	120	80 with 16 elements 105 with 24 elements 130 with 32 elements
Number of elements	16 / 32	32	16 / 24 / 32
Number of beams	74 / 154	154 criss-cross beams remain active up to complete door closure	74 / 114 / 154
Power supply	10 ... 30 VDC	10 ... 30 VDC	20 ... 265 VAC / DC Universal power supply UPS
Typical power consumption @ 24 VDC (without load)	40 mA	40 mA	120 mA
Output	PNP/NPN (push-pull)	PNP/NPN (push-pull)	Relay
Enclosure rating	IP65 / IP67 edges	IP65 / IP67 edges	IP65 / IP67 edges IP54 universal power supply UPS
Certificates	CE, CSA	CE, CSA	CE, CSA

Application segment

New facilities	●	●	
Modernization			●
Customer-specific applications			● (on request)

Optional

EN81-20 ready		●	●
Explosive environments (Ex)	●		
Halogen-free cable	●	●	●

CEDES Corporate Headquarters

CEDES AG
Science Park
Switzerland - 7302 Landquart
Phone: +41 81 307 2323
Email: info.eu@cedes.com
www.cedes.com

Switzerland

CEDES AG
Science Park
Switzerland - 7302 Landquart
Phone: +41 81 307 2323
Email: sales.eu@cedes.com

Italy

CEDES Italy
Via Mentana 8/A
Italy - 22100 Como (CO)
Phone: +39 031 273 154
Email: sales.eu@cedes.com

UK and Ireland

CEDES UK
1 Cutlers Farm
UK - HP14 3JW High Wycombe
Phone: +44 1494 882929
Email: sales.eu@cedes.com

Germany

CEDES GmbH
Elzmatten 6
Germany - 79365 Rheinhausen
Phone: +49 7643 91110
Email: sales.eu@cedes.com

France

CEDES France
4, Chemin de la côte Blanche
France - 27370 Saint Didier des Bois
Phone: +33 23 261 4313
Email: sales.eu@cedes.com

Spain

CEDES Iberia
C/Esquirols, 3
Spain - 08348 Cabrils, B
Phone: +34 93 753 7697
Email: sales.eu@cedes.com

Benelux

CEDES Benelux
Sportlaan 9
Belgium - 1740 Ternat
Phone: +32 25 826 292
Email: sales.eu@cedes.com

Poland

CEDES Poland
Ul. Moscickiego 44b
Poland - 05080 Lipkow
Phone: +48 22 722 8680
Email: sales.eu@cedes.com

North America

CEDES Corporation of America
7107 Ohms Lane
USA - Minneapolis, MN 55439
Phone: +1 612 424 8400
Email: sales.us@cedes.com

China

CEDES Sensor Co., Ltd.
Building No. 2, No. 806, Fengzhen Road
Hong Kou District
China - 200434 Shanghai
Phone: +86 21 6528 5280
Email: sales.cn@cedes.com

Asia - Pacific

CEDES Pte Ltd
996 Bendemer Road #07-05
B-Central
Singapore 339944
Phone: +65 6297 2550
Email: sales.ap@cedes.com

Taiwan

CEDES Taiwan
8 F-2, No. 190 Wu Chuan Road,
North District
Taiwan - 404 Taichung City
Phone: +886 4 220 14080
Email: sales.ap@cedes.com

